

Specifications:

Material:

Insulator: PA66 UL94V-0

Rating:

Current Rating: 3.0 Amp (22AWG)

Voltage Rating: 250V AC/DC

Operating Temperature Range: $-40^{\circ}\sim+105^{\circ}\text{C}$

Electrical:

Insulator resistance: 1000M ohm min.





Withstanding Voltage: 800V AC/Minute

Ordering Information

H2514AR-XXP-XA

1 2 3 4 5

- 1: — Series No.
2: — No. of Positions
3: — R: R/A Type
4: — W: White
B: Black
5: — A: In Bag

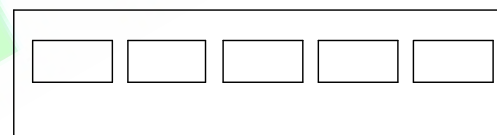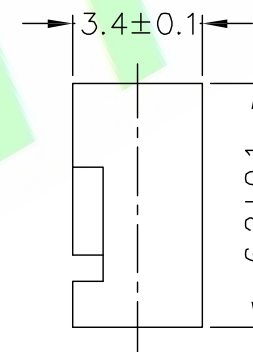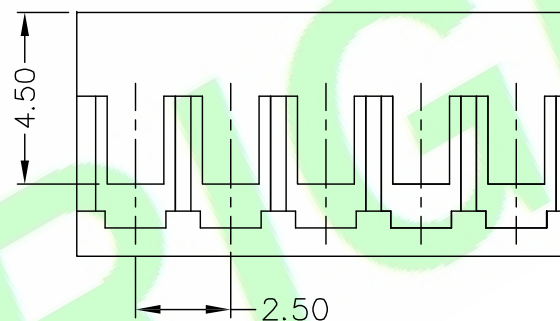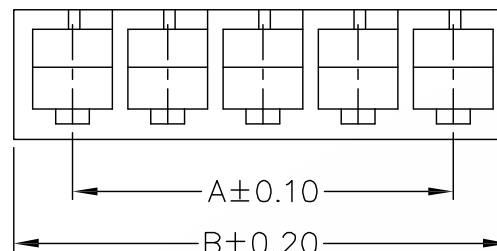


Circuits	Dimension mm		Circuits	Dimension mm	
	A	B		A	B
02	2.50	5.60	13	30.00	33.10
03	5.00	8.10	14	32.50	35.60
04	7.50	10.60	15	35.00	38.10
05	10.00	13.10	16	37.50	40.60
06	12.50	15.60	17	40.00	43.1
07	15.00	18.10	18	42.50	45.60
08	17.50	20.60	19	45.00	48.10
09	20.00	23.10	20	47.50	50.60
10	22.50	25.60	21	50.00	53.10
11	25.00	28.10	22	52.50	55.60
12	27.50	30.60	23	55.00	58.10

5X				DR.BY.: Kenry	
4X				CHKD.: Tony	
3X				APPD.: Billy	
2X	Update code options	Judyyan	20220725		
1X	ORIGINAL	Kenry			
REV.	DESCRIPTION	DR.BY	ECN. NO.		

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ± 0.38	X': $\pm 5.0^{\circ}$
X.X: ± 0.25	X.X': $\pm 3.0^{\circ}$
X.XX: ± 0.15	X.XX': $\pm 2.0^{\circ}$
X.XXX: ± 0.10	X.XXX': $\pm 1.0^{\circ}$

PART NO : H2514AR-XXP-XA
DWG. NO.:
TITLE : 2.50mm Pitch Housing R/A Type
DATE: 8-Sep-2015

HJBRIGHT® 東莞市華晶電子有限公司		
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
SHEET: 1/1		A4
SCALE: 1:1		
UNIT: mm		
THIRD ANGLE PROJECTION		