




Material: Phosphoric copper
Applicable wire sizes: AWG#22~28#

Current Rating: 3.0 Amp (22AWG)
Voltage Rating: 250V AC/DC
Operating Temperature Range: -40°~+105°C


Insulator resistance: 1000M ohm min.
Withstanding Voltage: 800V AC/Minute

H2514AST-PQ


1: — Series No.
2: — ST: Straight Type Terminal
3: — Q: Plated Tin

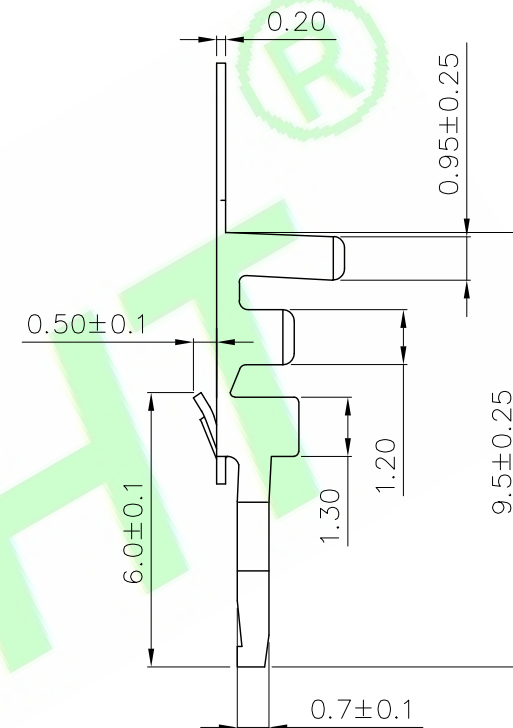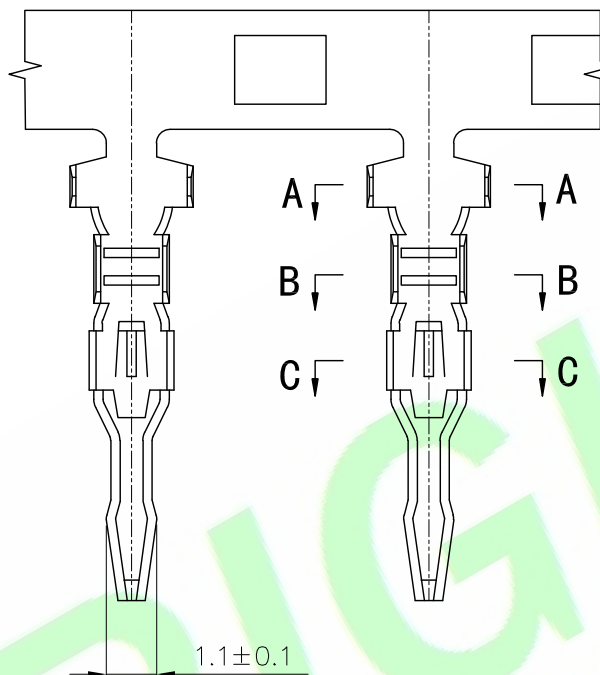


A-A

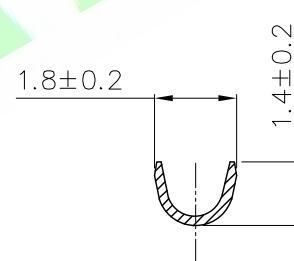

B-B

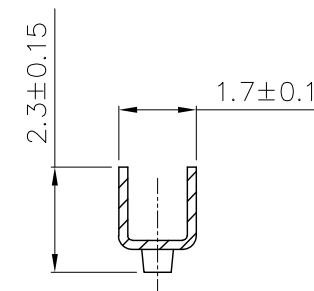

C-C

5X				DR.BY.: Mark	GENERAL TOLERANCE:		PART NO : H2514AST-PQ		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X					LINEAR ANGLES		DWG. NO.:				
3X	Update code options	Judyyan	20220726	CHKD.: Tony	x.: x.x: ±0.30	x': ±5.0° x.x': ±3.0°	TITLE : 2.5mm Pitch WTW Crimping Terminal		SHEET: 1/1		A4
2X	Revise drawings with physical objects	Judyyan	20220702		x.xx: ±0.25	x.xxx: ±2.0°			SCALE: 1:1		
1X	ORIGINAL	Mark		APPD.: Billy	x.xxx: ±0.10	x.xxx': ±1.0°	DATE: 22-Jul-2021	UNIT: mm	THIRD ANGLE PROJECTION		
REV.	DESCRIPTION	DR.BY	ECN. NO.								