

Specifications:

Material: Phosphoric copper

Applicable wire sizes: AWG#20, #22

Rating:

Current Rating: 3.0 Amp

Voltage Rating: 250V AC/DC

Operating Temperature Range: $-40^{\circ}\sim+105^{\circ}\text{C}$ **Electrical:**

Contact resistance: 10m Ohm Max


Insulator resistance: 500M ohm min.


Withstanding Voltage: 1500V AC/Minute

Ordering Information
H2516TM-PX

1 2 3

- 1: — Series No.
2: — TM: Male Terminal
3: — Q: Plated Tin

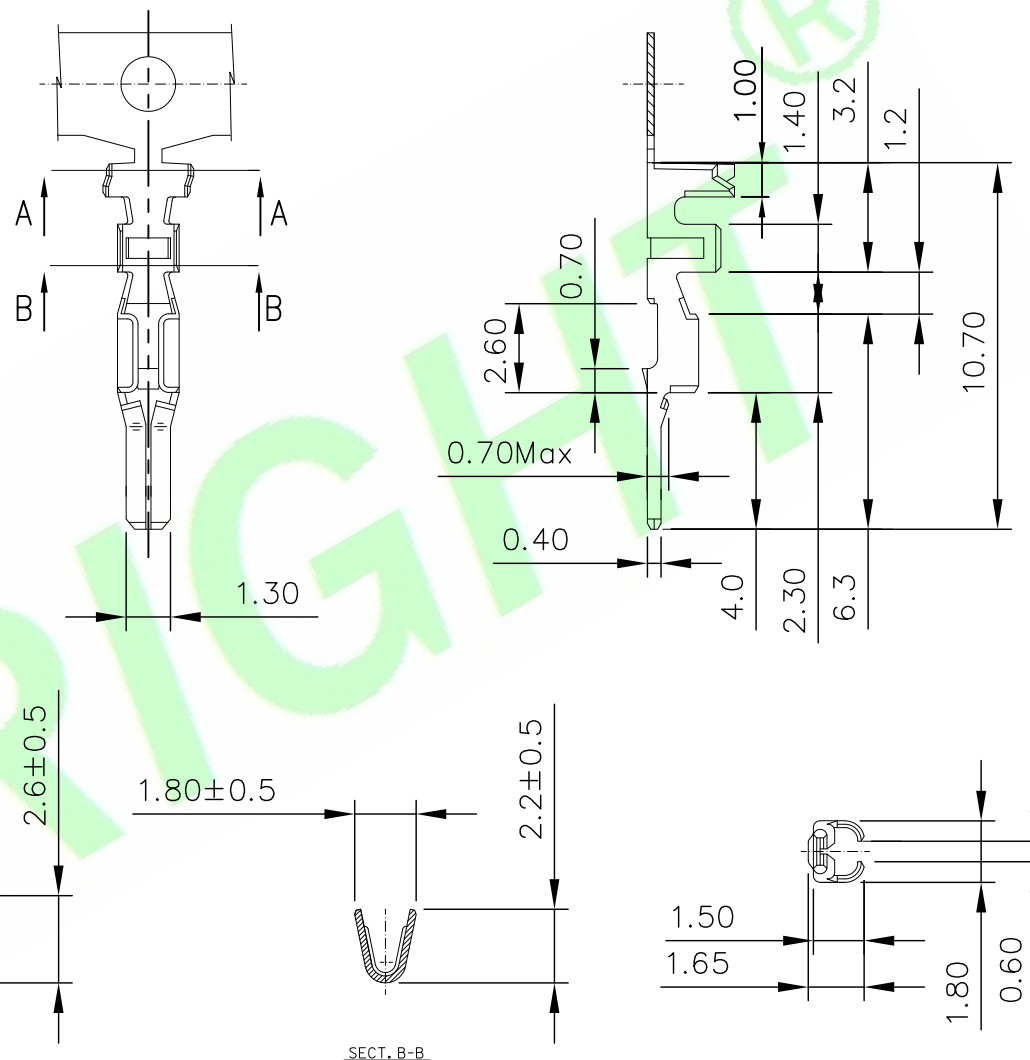

5X				DR.BY.: Samson	GENERAL TOLERANCE:	PART NO : H2516TM-PX	HJBRIGHT® 东莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
4X					LINEAR	DWG. NO.:		
3X				CHKD.: Tony	10 UNDER ±0.2	TITLE :	SHEET: 1/1	 THIRD ANGLE PROJECTION
2X	Update Code options	Judyyan	20221221		10 OVER 30 UNDER ±0.5	2.50mm Pitch Male Terminal	SCALE: 1:1	
1X	ORIGINAL	Samson		APPD.: Billy	30 UNDER ±0.3	DATE: 23-Oct-2013	UNIT: mm	
REV.	DESCRIPTION	DR.BY	ECN. NO.		ANGULAR ±3°			A4