

RoHS Compliant

Specifications:

Material:

Insulator: PA66 UL94V-0

Rating:

Current Rating: 3.0 Amp(22AWG)

Voltage Rating: 250V AC/DC


Operating Temperature Range: -40~+105°C

Electrical:

Contact resistance: 15m Ohm Max

Insulator resistance: 500M ohm min.

Withstanding Voltage: 1500V AC/Minute

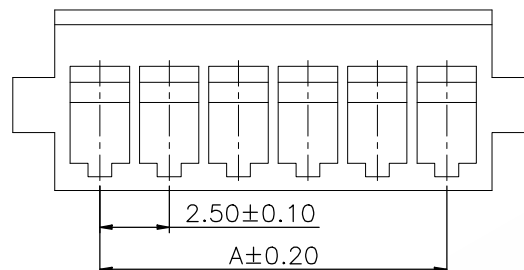

Ordering Information

H2519-XXP-XA

1 2 34

1: Series No.

2: No. of Positions

3: N: Natural

B: Black

BR: Brown

BL: Blue


GN: Green

Y: Yellow

O: Orange

TR: Tomato red

4: A: In Bag

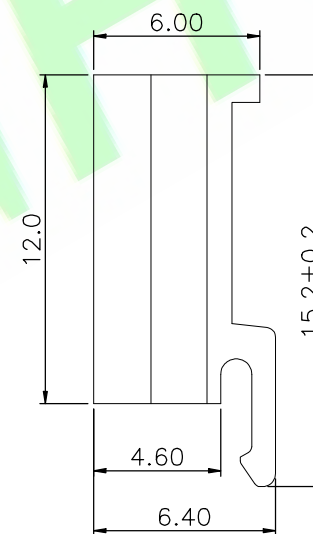

Poles	Dimensions(mm)	
	A	B
02	2.50	5.90
03	5.00	8.40
04	7.50	10.90
05	10.00	13.40
06	12.50	15.90
07	15.00	18.40
08	17.50	20.90
09	20.00	23.40
10	22.50	25.90
11	25.00	28.40
12	27.50	30.90
13	30.00	33.40
14	32.50	35.90
15	35.00	38.40
16	37.50	40.90
17	40.00	43.40
18	42.50	45.90
19	45.00	48.40
20	47.50	50.90
21	50.00	53.40
22	52.50	55.90
23	55.00	58.40
24	57.50	60.90
25	60.00	63.40

5X				DR.BY.: Tsw	GENERAL TOLERANCE:		PART NO : H2519-XXP-XA	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X					LINEAR	ANGLES	DWG. NO.:			
3X				CHKD.: Tony	x.: ±0.38	x': ±5.0°	TITLE : 2.50mm Pitch Housing	SHEET: 1/1		A4
2X	Update Code options	Judyyan	20221110		x.x: ±0.25	x.x': ±3.0°		SCALE: 1:1		
1X	ORIGINAL	Tsw		APPD.:	x.xx: ±0.15	x.xx': ±2.0°		UNIT: mm		
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.10	x.xxx': ±1.0°	DATE: 4-Jan-2022	THIRD ANGLE PROJECTION		