

Specifications:

Material: Phosphor Bronze

Wire Sizes: AWG#22~28#

Insulation O.D.: 1.90mm (max)

Plating: Tin Plated

Rating:

Current Rating: 3.0 Amp(22AWG)

Voltage Rating: 250V AC/DC

Operating Temperature Range: -40°~+105°C

Electrical:

Contact resistance: 15m Ohm Max

Insulator resistance: 500M ohm min.

Withstanding Voltage: 1500V AC/Minute

Ordering Information


H2519T-PX

1 2 3

1: — Series No.

2: — T: Terminal

3: — Q: Plated Tin

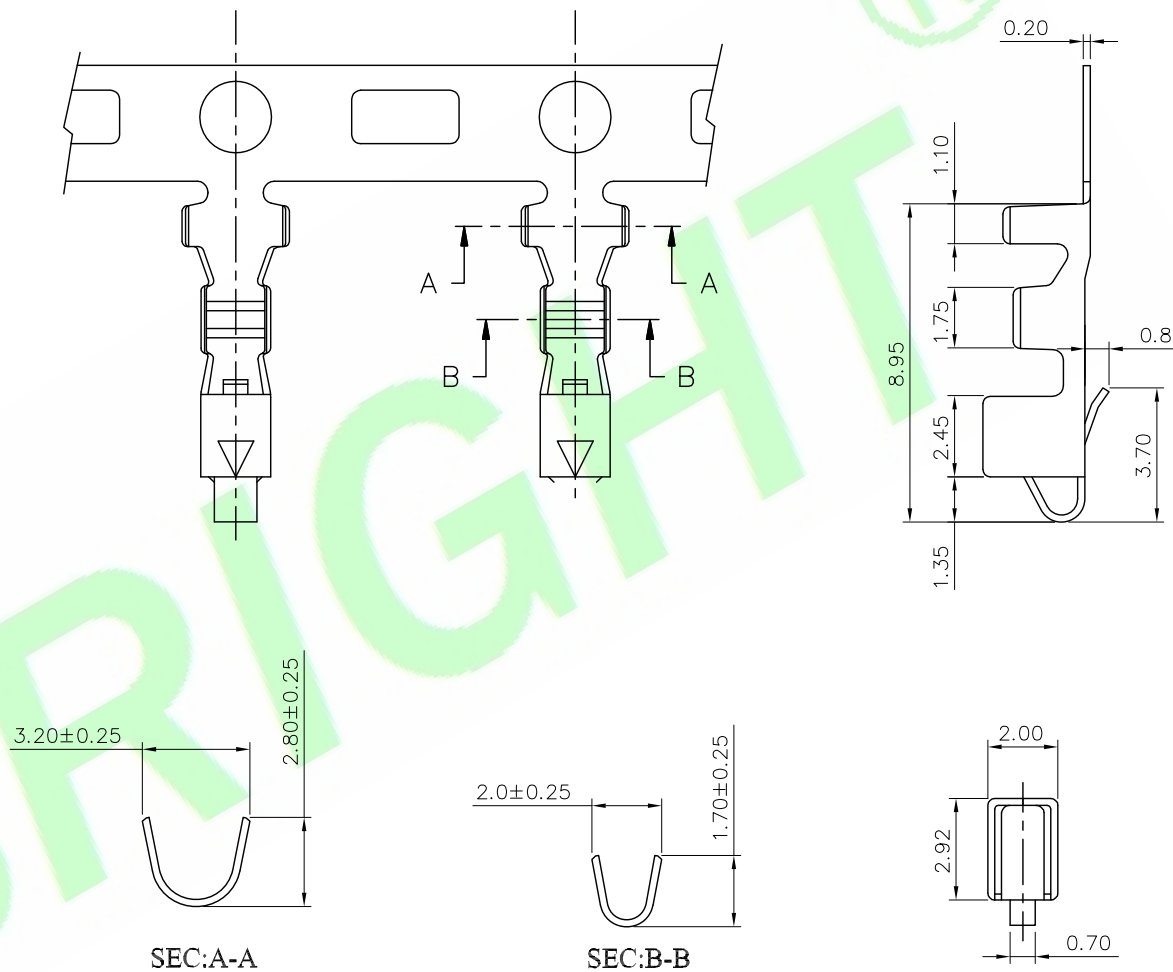

5X				DR.BY: Tsw	GENERAL TOLERANCE:		PART NO : H2519T-PX	HJBRIGHT® 东莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED							
4X						LINEAR	ANGLES				DWG. NO.:				
3X				CHKD.: Mark	X.: ±	X': ±	TITLE : 2.50mm Pitch Terminal	SHEET: 1/1			A4				
2X	Update code options	Judyyan	20221115			X.X: ±0.30		X.X': ±	SCALE: 1:1						
1X	ORIGINAL	Tsw		APPD.: Billy	X.XX: ±0.20	X.XX': ±		UNIT: mm	THIRD ANGLE PROJECTION						
REV.	DESCRIPTION	DR.BY	ECN. NO.			X.XXX: ±0.10		X.XXX': ±	DATE: 4-Jan-2022						
1		2		3		4		5		6		7		8	