

RoHS Compliant

Specifications:

Material:

Insulator: PBT UL94V-0

Rating:

Current Rating: 3.0Amp(6P-20P)

2.0Amp(20P-40P/22AWG)

Voltage Rating: 250V AC/DC



Operating Temperature Range: -40°~+105°C

Electrical:

Contact resistance: 20m Ohm Max

Insulator resistance: 1000M ohm min.

Withstanding Voltage: 1000V AC/Minute

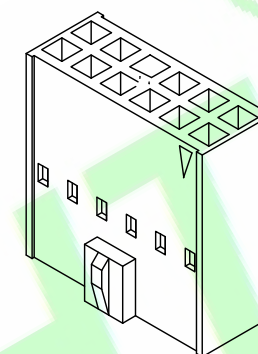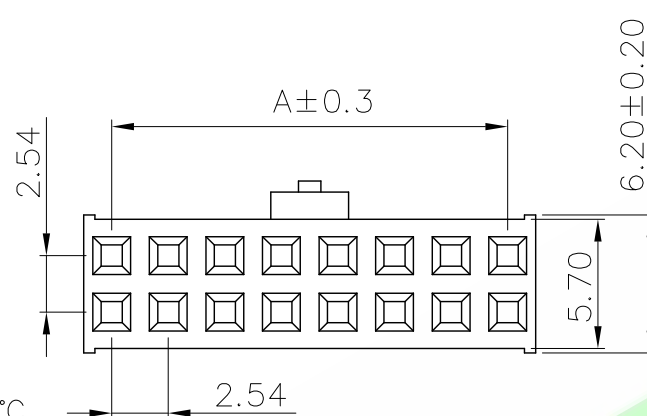



Poles	Dimensions (mm)	
	A	B
04P	2.54	5.28
06P	5.08	7.82
08P	7.62	10.36
10P	10.16	12.90
12P	12.70	15.44
14P	15.24	17.98
16P	17.78	20.52
18P	20.32	23.06
20P	22.86	25.60
22P	25.40	28.14
24P	27.94	30.68
26P	30.48	33.22
28P	33.02	35.76
30P	35.56	38.30
32P	38.10	40.84
34P	40.64	43.38
36P	43.18	45.92
38P	45.72	48.46
40P	48.26	51.00
42P	50.80	53.54
44P	53.34	56.08
46P	55.88	58.62
48P	58.42	61.16
50P	60.96	63.70
52P	63.50	66.24
54P	66.04	68.78
56P	68.58	71.32
58P	71.12	73.86
60P	73.66	76.40
62P	76.20	78.94
64P	78.74	81.48

Ordering Information

H254011-XXP-XA

1 2 3 4

- 1: — Series No.
2: — No. of Positions
3: — N: Natural
B: Black
4: — A: In Bag

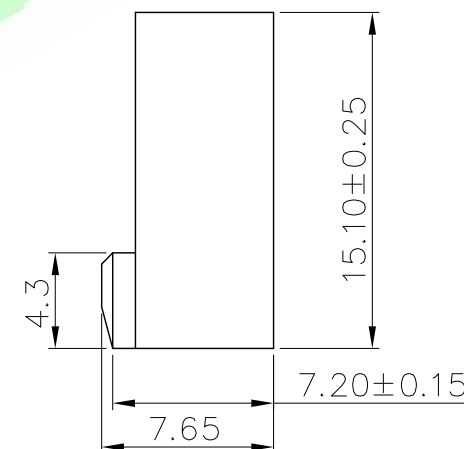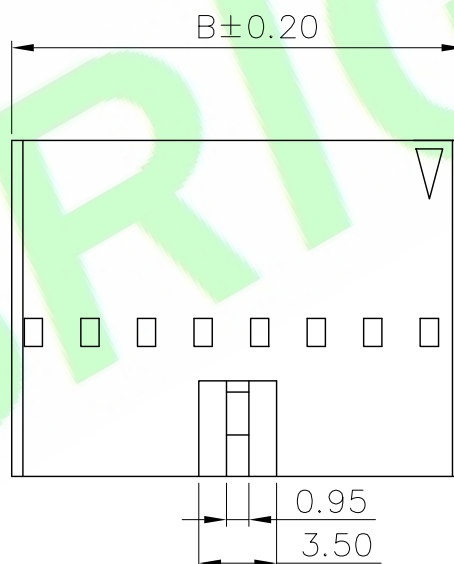

5X				DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : H254011-XXP-XA		HJBRIGHT® 东莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
4X					LINEAR	ANGLES	DWG. NO.:					
3X				CHKD.: Tony	x.: ±0.30	x': ±5.0°	TITLE : MX 2.54mm Pitch Housing		SHEET: 1/1			A4
2X	Update code options	Judyyan	20220525		x.x: ±0.20	x.x': ±3.0°			SCALE: 1:1			
1X	ORIGINAL	Samson		APPD.: Billy	x.xx: ±0.15	x.xx': ±2.0°			UNIT: mm			
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.10	x.xxx': ±1.0°	DATE: 22-Jul-2014				THIRD ANGLE PROJECTION	