

RoHS Compliant

Specifications:

Material: Phosphor Bronze
Plating : Tin Plated Or Gold Flash

Rating:

Voltage Rating:250V AC/DC

Electrical:

Contact resistance:20m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:1000V AC/Minute
Wire Range:AWG #22-#28

Ordering Information

H254011T-PX

1 2 3


1:— Series No.

2:— Terminal

3:— A:Gold flash

Q:Tin Plated

H:Gold flash on contact;Matte Tin on tail

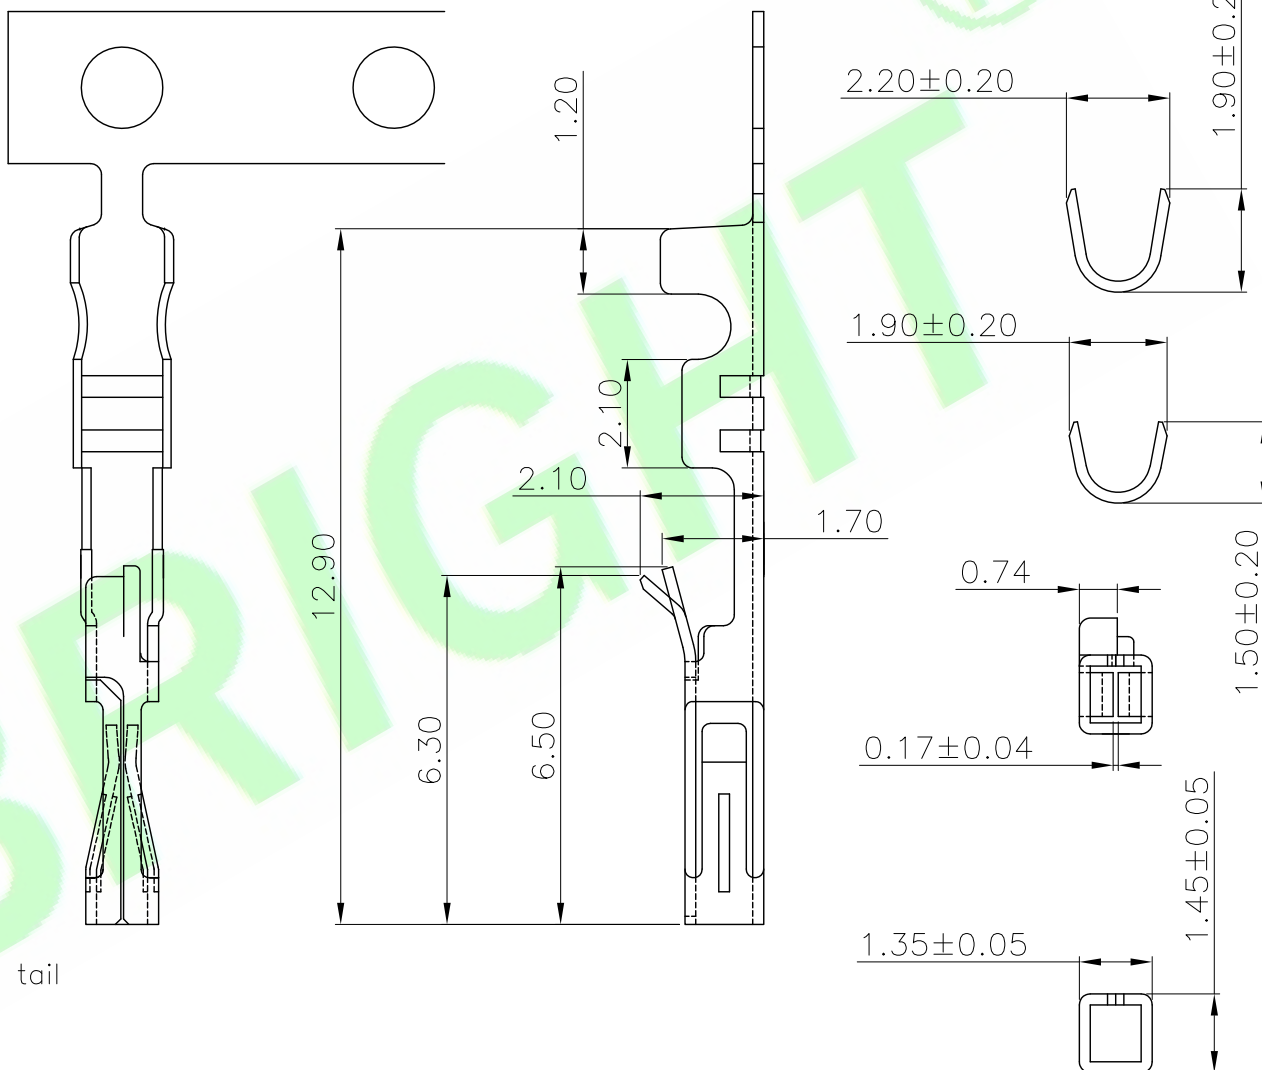

5X				DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : H254011T-PX	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X					LINEAR	ANGLES	DWG. NO.:			
3X				CHKD.: Tony	X.:	X': ±1.0°	TITLE :	SHEET: 1/1		A4
2X	Update code options	Judyyan	20220825		X.X: ±0.30	X.X':		SCALE: 1:1		
1X	ORIGINAL	Samson		APPD.:	X.XX: ±0.20	X.XX':	UNIT: mm	THIRD ANGLE PROJECTION		
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	X.XXX: ±0.10	X.XXX':	DATE: 12-Jun-2015			