

Specifications:
Material And Finish:
Contact: Phosphor Bronze
Wire Range: 20~30AWG
Insulation O.D.: 1.83mm(Max)


Rating:
Current Rating: 2.9 Amp
Voltage Rating: 275V AC
Operating Temperature Range: -55°C~+125°C

Ordering Information
H254012TF-PT1-XX

1 2 3 4

- 1: — Series No.
2: — TF: Female Terminal
3: — T1: 10u" Gold On Contact,
Tin On Tail

- ☒ 4: — 01: Apply 20-24AWG
02: Apply 26-30AWG

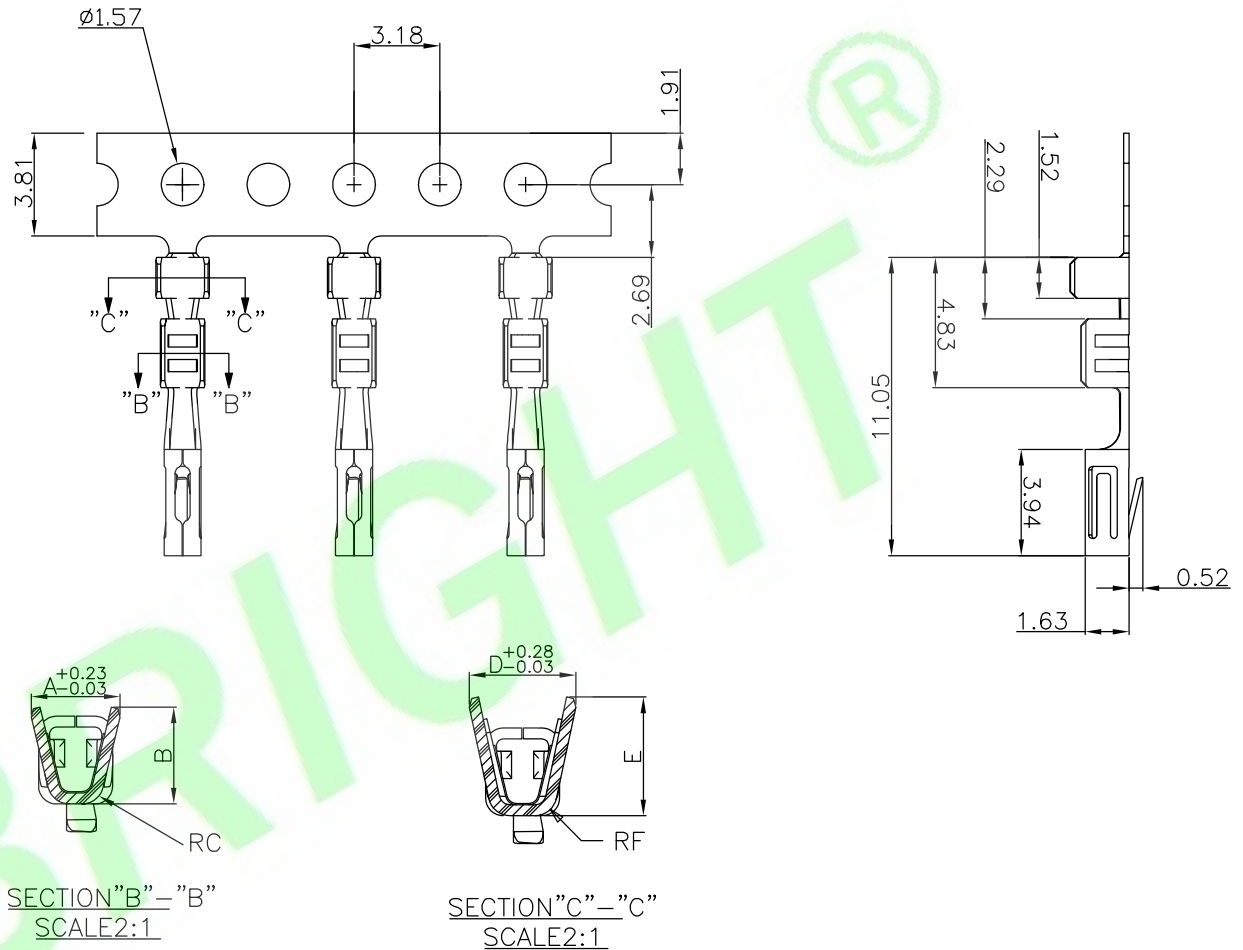

PART No.	A	B	C	D	E	F
H254012TF-PT1-01	2.03	1.85	0.46	2.80	2.62	0.76
H254012TF-PT1-02	1.40	1.14	0.38	2.03	1.85	0.64

5X				DR.BY.: Zolin	GENERAL TOLERANCE: LINEAR ANGLES		PART NO : H254012TF-PT1-XX DWG. NO.:		HJBRIGHT® 东莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
4X				CHKD.: Aren						
3X				APPD.: Billy	X.: ±0.30	X': ±5.0'	TITLE : 2.54mm Pitch Female Terminal		SHEET: 1/1 SCALE: 1:1 UNIT: mm	THIRD ANGLE PROJECTION
2X	Add Code Options	Zolin	20240408		X.X: ±0.20	X.X': ±3.0'				
1X	ORIGINAL	Zolin			X.XX: ±0.15	X.XX': ±2.0'	DATE: 06-Dec-2022		A4	
REV	DESCRIPTION	DR.BY	ECN. NO.		X.XXX: ±0.10	X.XXX': ±1.0'				