

Specifications:**Material And Finish:**

Insulator: PBT UL94V-0

Color: See Ordering Information

Rating:

Current Rating: 3.5 Amp (22AWG)

Voltage Rating: 250V AC/DC

Operating Temperature

Range: $-40^{\circ}\sim+120^{\circ}\text{C}$ **Ordering Information****H25414F-04-XXA**

1 2 3 4 5 6

1: — Series No.

2: — F: Female Housing

3: — No. of Positions

4: — B: Black

N: Natural

L: Blue

G: Green

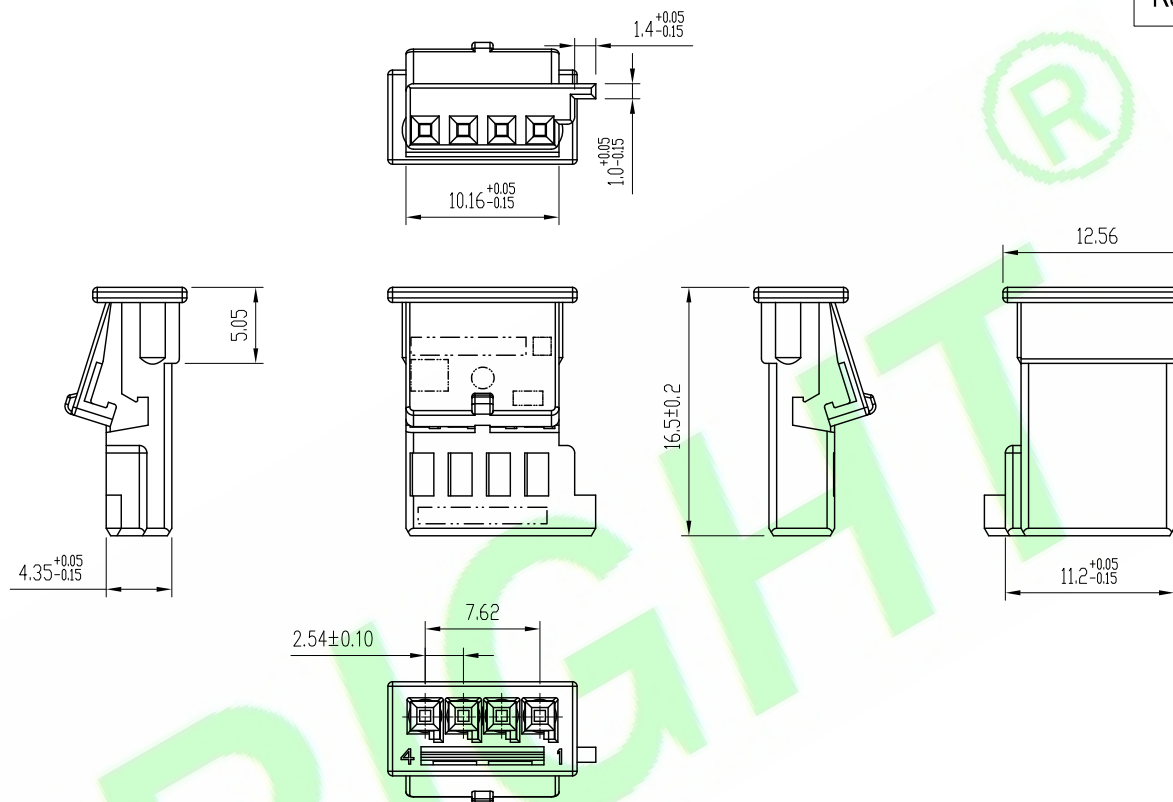
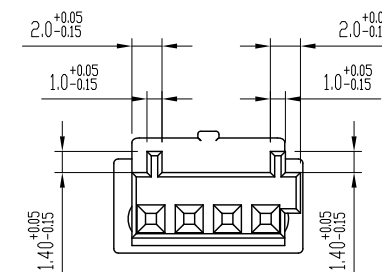



5: — A: A Type

B: B Type

C: C Type

E: E Type

6: — A: In Bag

**A Type****B Type****C Type****E Type****BLACK****NATURAL****BLUE****GREEN**

5X			
4X			
3X			
2X	Update code options	Judyyan	20220824
1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO.


DR.BY:	Judyyan
CHKD.:	Aren
APPD.:	Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
X: $\pm$	X': $\pm$
X.X: ± 0.30	X.X': $\pm$
X.XX: ± 0.20	X.XX': $\pm$
X.XXX: ± 0.10	X.XXX': $\pm$

PART NO : H25414F-04-XXA
DWG. NO.:
TITLE :
2.54mm Pitch Female Housing
DATE: 19-Aug-2020

HJBRIGHT® 东莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4