

Specifications:**Material And Finish:**

Insulator: PBT UL94V-0

Color: See Ordering Information

Rating:

Current Rating: 3.5 Amp (22AWG)

Voltage Rating: 250V AC/DC

Operating Temperature Range: -40°~+120°C

Electrical:

Contact resistance: 10m Ohm Max

Insulator resistance: 1000M ohm min.

Dielectric Voltage: 1000V AC/Minute

Ordering InformationH25414F1-03P-XX-A

1 2 3 4 5

1: — Series No.

2: — F: Female Housing

3: — No. of Positions

4: — 01: A Type Black

02: B Type White

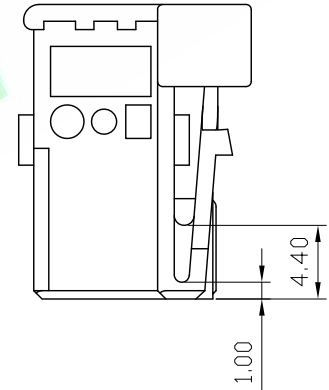


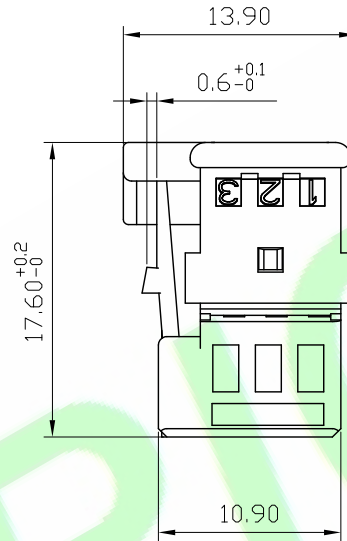

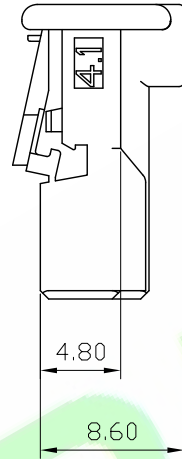
03: C Type Blue

04: D Type Yellow

05: E Type Grey

06: F Type Brown

5: — A: In Bag

**KEYING TABLE**

TYPE		A	B
A TYPE BLACK		6.5	0
B TYPE WHITE		5.2	1.3
C TYPE BLUE		4	2.5
D TYPE YELLOW		2.7	3.8
E TYPE GREY		1.5	5
F TYPE BROWN		0	6.3

5X			
4X			
3X			
2X			
1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO.


DR.BY:	Judyyan
CHKD.:	Aren
APPD.:	Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ±	X': ±
X.X: ±0.30	X.X': ±
X.XX: ±0.20	X.XX': ±
X.XXX: ±0.10	X.XXX': ±

PART NO : H25414F1-03P-XX-A
DWG. NO.:
TITLE : 2.54mm Pitch Female Housing
DATE: 19-Aug-2021

HJBRIGHT® 东莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4