

RoHS Compliant



Specifications:

Material:

Insulator:PBT UL94V-0

Rating:

Current Rating:3.0 Amp

Voltage Rating:24V AC/DC

Operating Temperature Range:-40°C~+110°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:100M ohm min.

Withstanding Voltage:1000V AC/Minute

Ordering Information

H25414F4-14P-01-A

1 2 3 4 5

1:— Series No.

2:— F:Female Housing

3:— No. of Positions


4:— 01: BLACK

02: YELLOW

03: DARK GRAY

04: BROWN

5:— A:In Bag

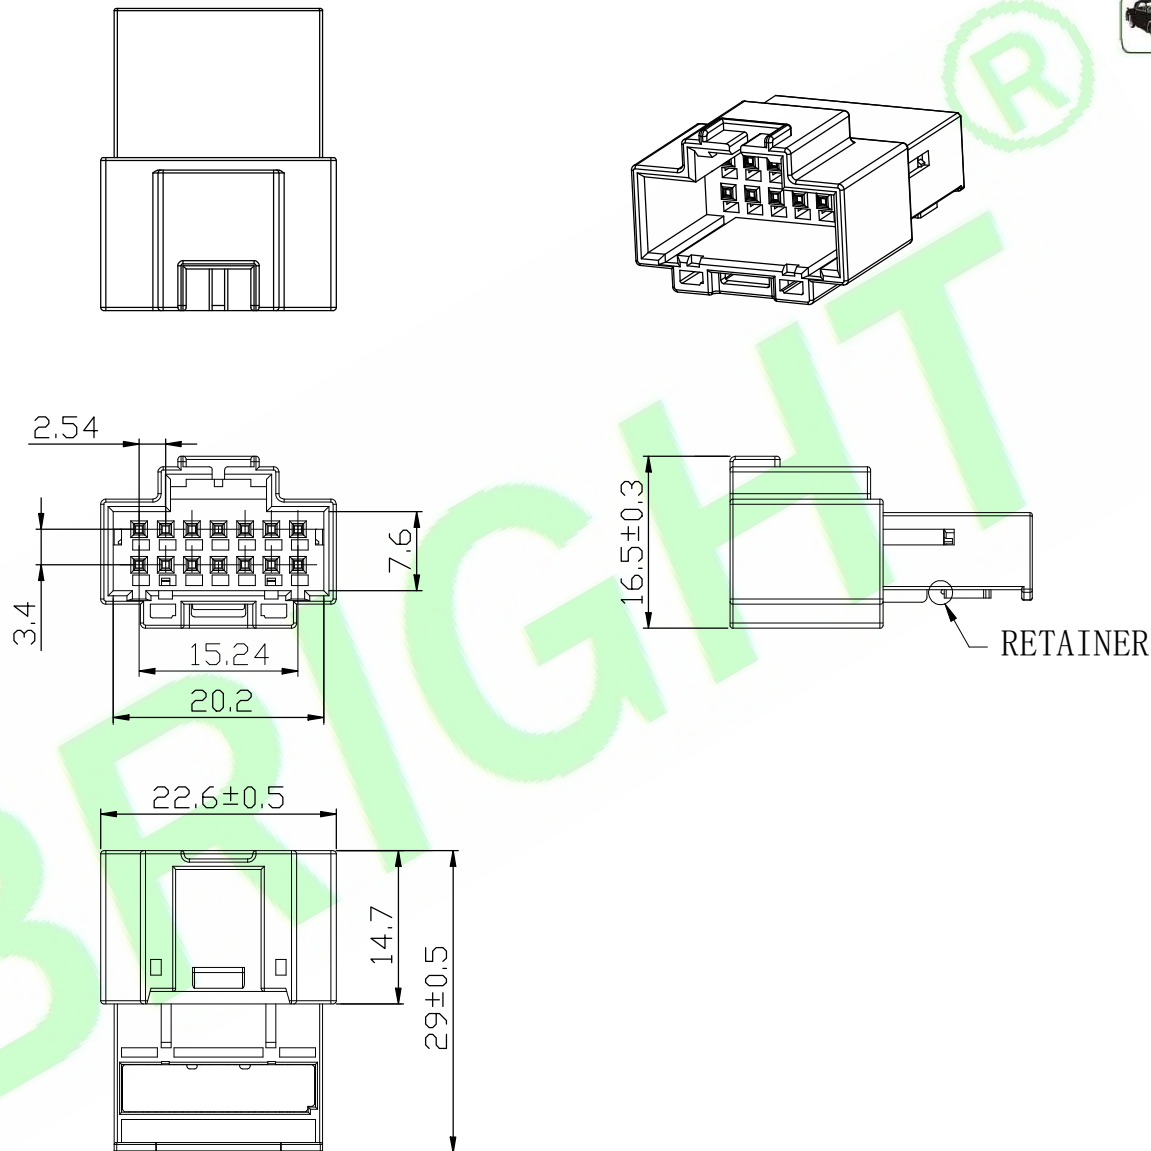

DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : H25414F4-14P-01-A
	LINEAR	ANGLES	
CHKD.: Hu.ch	X.: ±0.30	X': ±3.0°	DWG. NO.:
	X.X: ±0.20	X.X': ±1.0°	
APPD.: Billy	X.XX: ±0.10	X.XX': ±0.5°	TITLE H25414F4 Series Female Housing wire to wire type
	X.XXX: ±0.10	X.XXX': ±	
DATE: 25-Apr-2022			

HJBRIGHT® 东莞市華晶电子有限公司
BRIGHE-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4

1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO.