

Specifications:

Material And Finish:

Insulator: PBT UL94V-0

Color: See Ordering Information

Rating:

Current Rating: 3.5 Amp (22AWG)

Voltage Rating: 250V AC/DC

Operating Temperature Range: $-40^{\circ}\sim+120^{\circ}\text{C}$

Ordering Information

H25414M-03-XXA

1 2 3 4 5 6

1: — Series No.

2: — M: Male

3: — No. of Positions

4: — B: Black

N: Natural






L: Blue

5: — A: A Type


B: B Type

C: C Type


6: — A: In Bag

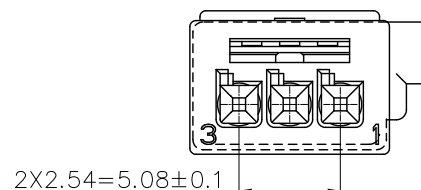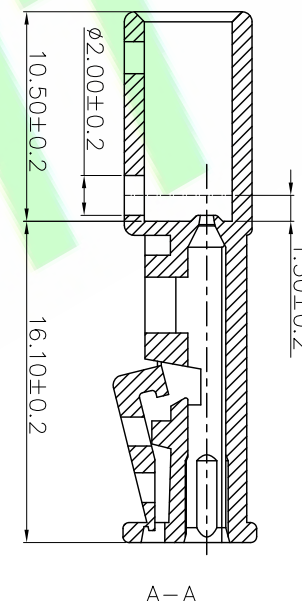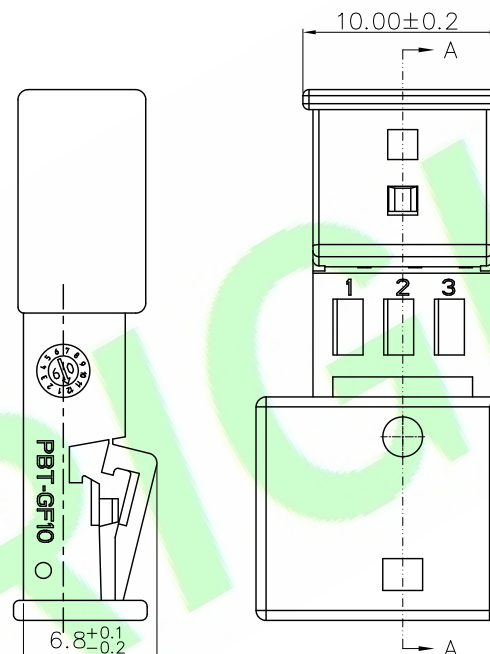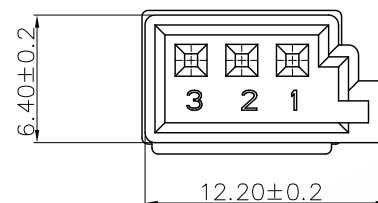

BLACK



NATURAL



BLUE

5X				DR.BY:	GENERAL TOLERANCE:		PART NO : H25414M-03-XXA		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X				Mark	LINEAR	ANGLES	DWG. NO.:				
3X				CHKD:	x: ±	x': ±	TITLE : 2.54mm Pitch 03P Male Housing		SHEET: 1/1		A4
2X	Update code options	Judyyan	20220824	Ren	x.x: ±0.30	x.x': ±			SCALE: 1:1		
1X	ORIGINAL	Mark		APPD.:	x.xx: ±0.20	x.xx': ±	DATE: 15-Aug-2021		UNIT: mm		
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.10	x.xxx': ±					