

Specifications:

Material And Finish:

Insulator:PBT UL94V-0

Color:See Ordering Information

Rating:

Current Rating:3.5 Amp (22AWG)

Voltage Rating:250V DC

Operating Temperature Range:-40°~+120°C

Electrical:

Contact resistance:10m Ohm Max

Insulator resistance:100M ohm min.






Withstanding Voltage:500V AC/Minute

Ordering Information


H25414M3-04P-XXA

1 2 3 4 5 6


- 1:— Series No.
2:— F:Female
3:— No. of Positions
4:— A:A Type With CPA
B:B Type With Out CPA
5:— GR:Dark Grey
Y:Yellow
B:Black
6:— A:In Bag

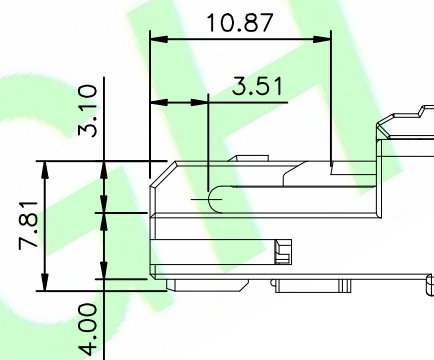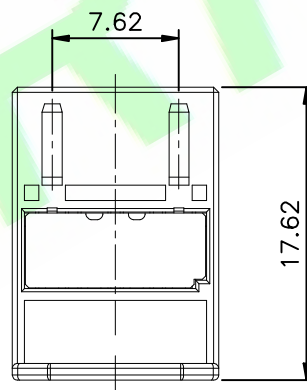

A Type With CPA



B Type With Out CPA



5X			
4X			
3X			
2X			
1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Judyyan
CHKD.: Ren
APPD.: Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ±	X': ±
X.X: ±0.30	X.X': ±
X.XX: ±0.20	X.XX': ±
X.XXX: ±0.10	X.XXX': ±

PART NO : H25414M3-04P-XXA

DWG. NO.:

TITLE :

2.54mm Pitch 04P Male Housing

DATE: 15-Aug-2022

HIBRIGHT®

東莞市華晶電子有限公司

BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4