

Specifications:

Material:

Insulator:PBT UL94V-0 Color:Black

Rating:

Current Rating:3.0 Amp

Voltage Rating:24V AC/DC

Operating Temperature Range:-40°C~+110°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:100M ohm min.

Withstanding Voltage:1000V AC/Minute

Ordering Information

H25414M4-14P-01-A






1 2 3 4

1:— Series No.

2:— M:Male Housing

3:— No. of Positions

4:— A:In Bag

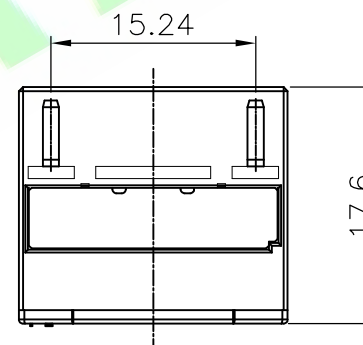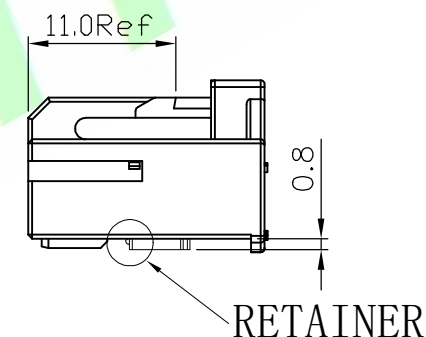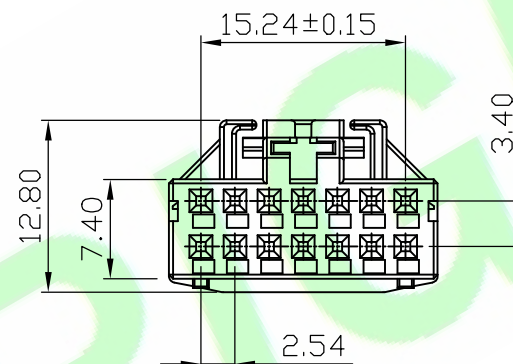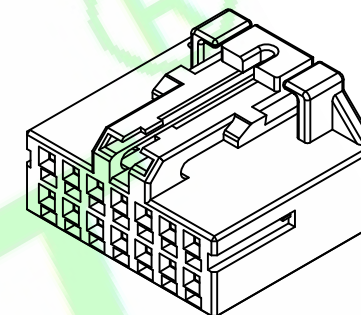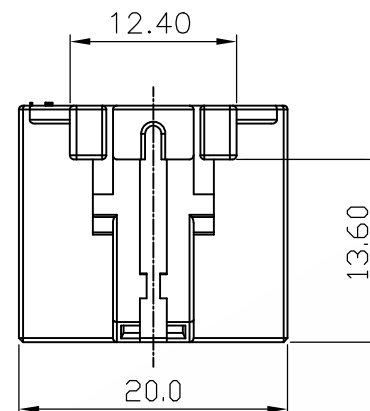

1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO

DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : H25414M4-14P-01-A	
	LINEAR	ANGLES	DWG. NO.:	
CHKD.: Hu.ch	x.:	x': ±3.0°	TITLE : H25414M4 Series Male Housing wire to wire type	
	x.x: ±0.30	x.x': ±1.0°		
APPD.: Billy	x.xx: ±0.20	x.xx': ±0.5°	DATE: 25-Apr-2022	
	x.xxx: ±0.10	x.xxx': ±		

HJBRIGHT® 东莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4