

Specifications:
Material And Finish:
Contact: Copper alloy




Rating:
Current Rating: 3A(22AWG)
Operating Temperature Range: $-40^{\circ}\sim+125^{\circ}\text{C}$
Contact resistance: 20m Ohm Max
Applicable Wire: 18~22AWG(0.3~0.85mm²)

Ordering Information


H25416TF-PQ-XX
1 2 3 4

- 1: — Series No.
2: — TF: Female Terminal
3: — Q: Tin Plated
4: — 01: 22~20AWG
02: 18AWG


H25416TF-PQ-01	20~22AWG	$\phi 1.20\sim 1.90\text{mm}$	1.82
H25416TF-PQ-02	18AWG	$\phi 1.50\sim 1.90\text{mm}$	1.96
P/N	WIRE RANGE	CABLE DIAMETER	W1

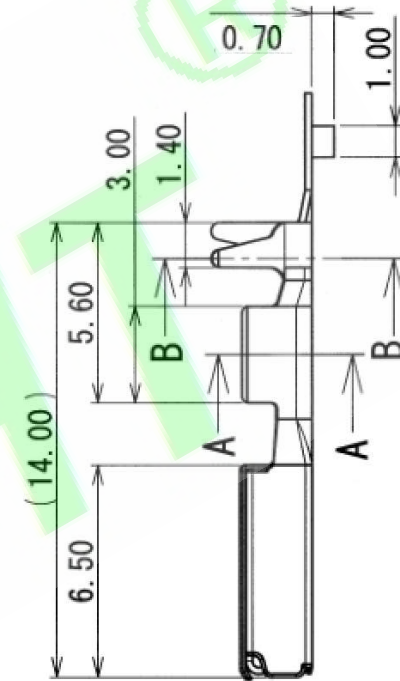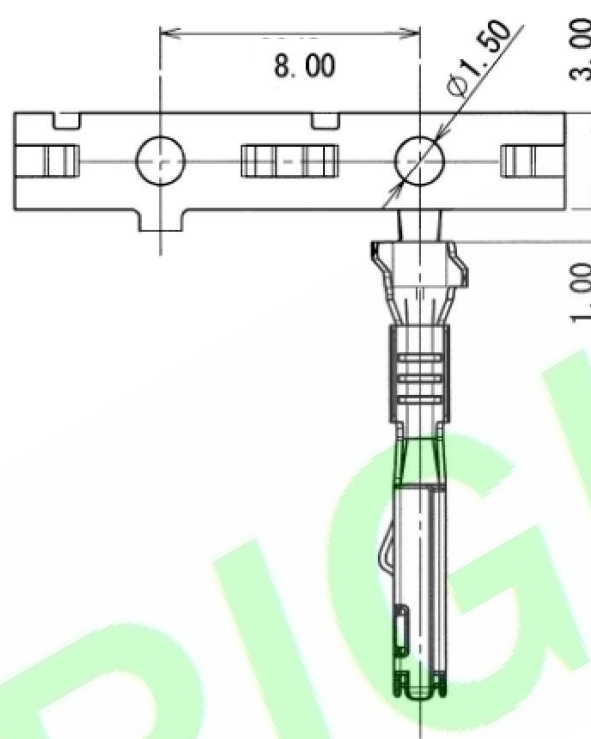

SEC. A-A



SEC. B-B



				DR.BY.: Samson		GENERAL TOLERANCE:		PART NO : H25416TF-PQ-XX		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED					
						LINEAR	ANGLES								
				CHKD.: Tony		X.: ±0.40	X': REF±6°	DWG. NO.:							
						X.X: ±0.35	X.X': ±3.0°	TITLE :							
				APPD.: Billy		X.XX: ±0.25	X.XX': ±2.0°	Pitch 2.54mm Connector Female Terminal		SHEET: 1/1				A4	
						X.XXX: ±0.15	X.XXX':	DATE: 16-Sep-2023		SCALE: 1:1					
										UNIT: mm					
1X		ORIGINAL		Judyyan											
REV.		DESCRIPTION		DR.BY		ECN. NO.									
1				2		3		4		5		6		7	
														8	