

RoHS Compliant

Specifications:**Material:**

Insulator: PBT UL94V-0 Color Black

Rating:

Current Rating: 3Amp (22AWG)

Voltage Rating: 250V AC/DC


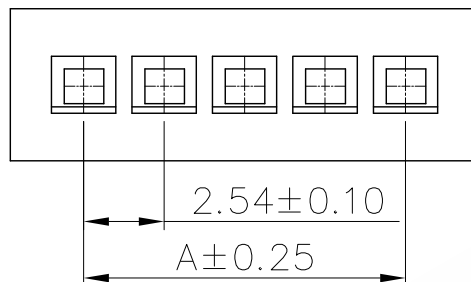
Operating Temperature Range: -40°~+105°C

Electrical:

Contact resistance: 15m Ohm Max

Insulator resistance: 1000M ohm min.

Withstanding Voltage: 1000V AC/Minute

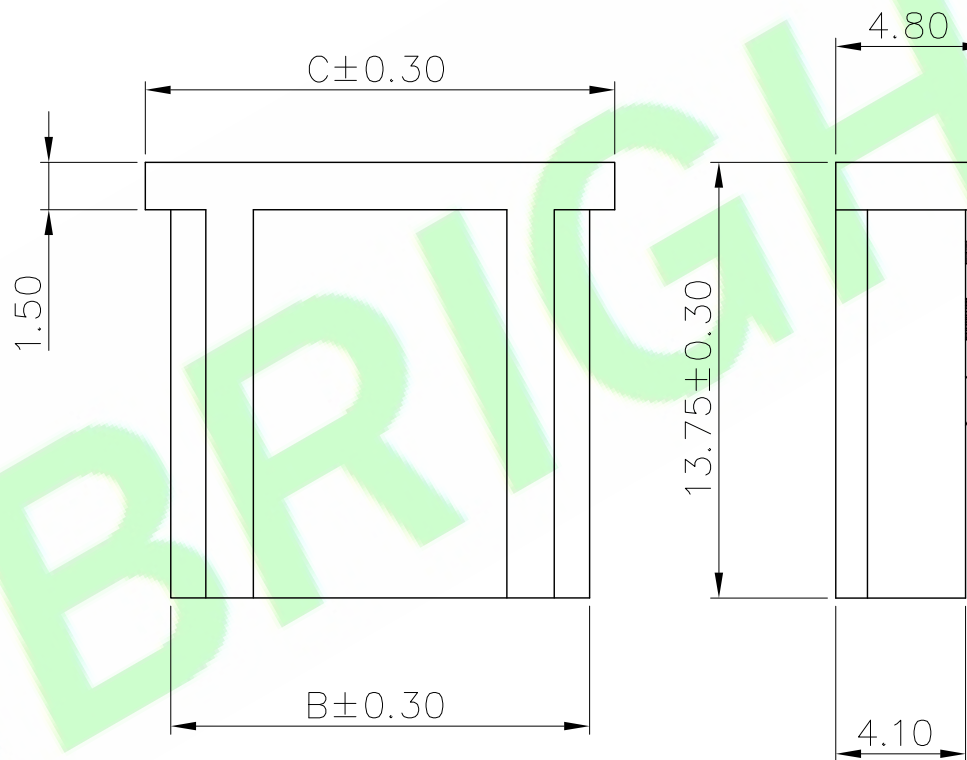
**Ordering Information**H2543-XXP-A

1 2 3

1: — Series No.

2: — No. of Positions

3: — A: In Bag



No.	Dimension mm		
	A	B	C
02P	2.54	5.60	7.20
03P	5.08	8.14	9.74
4P	7.62	10.68	12.28
5P	10.16	13.22	14.82
6P	12.70	15.76	17.36
7P	15.24	18.30	19.90
8P	17.78	20.84	22.44
9P	20.32	23.38	24.98
10P	22.86	25.92	27.52
11P	25.40	28.46	30.06
12P	27.94	31.00	32.60
13P	30.48	33.54	35.14
14P	33.02	36.08	37.68
15P	35.56	38.62	40.22
16P	38.10	41.16	42.76
17P	40.64	43.70	45.30
18P	43.18	46.24	47.84
19P	45.72	48.78	50.38
20P	48.26	51.32	52.92
21P	50.80	53.86	55.46
22P	53.34	56.40	58.00

5X				DR.BY.: Apra	GENERAL TOLERANCE:		PART NO : H2543-XXP-A		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED SHEET: 1/1 SCALE: 1:1 UNIT: mm  THIRD ANGLE PROJECTION A4		
4X						LINEAR	ANGLES				
3X				CHKD.: Aaron	x.: ±	x': ±	DWG. NO.:	TITLE : 2.54mm Pitch Housing			
2X	Update Code options	Judyyan	20221102		x.x: ±0.25	x.x': ±					
1X	ORIGINAL	Apra		x.xx: ±0.15	x.xx': ±	DATE: 24-Nov-2017					
REV.	DESCRIPTION	DR.BY	ECN. NO.	APPD.: Billy	x.xxx: ±0.05		x.xxx': ±				