

RoHS Compliant

Specifications:**Material:**

Insulator: PBT UL94V-0 Color Black

Rating:

Current Rating: 3.0Amp (22AWG)

Voltage Rating: 250V AC/DC

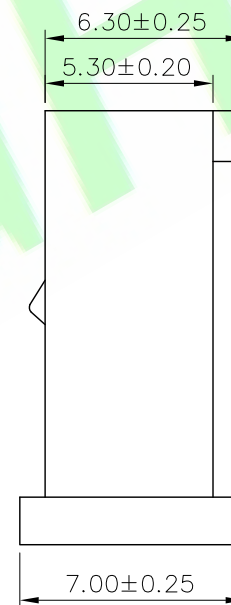
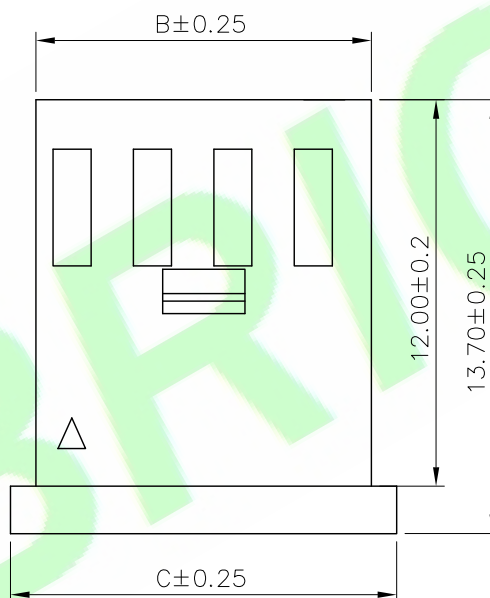
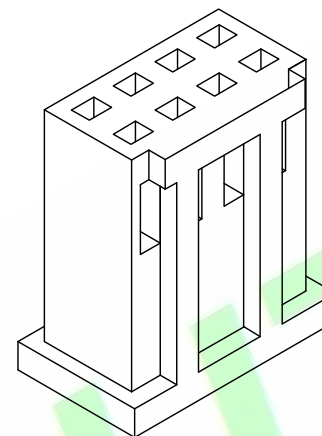
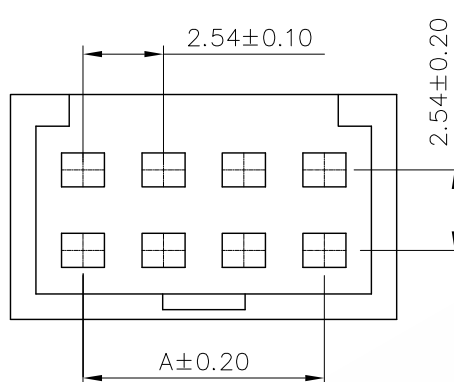
Operating Temperature Range: -40°~+105°C

Electrical:

Contact resistance: 15m Ohm Max

Insulator resistance: 1000M ohm min.

Withstanding Voltage: 1000V AC/Minute

**Ordering Information****H254300-XXP-A**

1 2 3

1: — Series No.

2: — No. of Positions

3: — A: In Bag

Poles	Dimensions (mm)		
	A	B	C
2*3P	5.08	8.06	9.66
2*4P	7.62	10.60	12.20
2*5P	10.16	13.14	14.74
2*6P	12.70	15.68	17.28
2*7P	15.24	18.22	17.78
2*8P	17.78	20.76	19.82
2*9P	20.32	23.30	22.36
2*10P	22.86	25.84	24.90
2*11P	25.40	28.38	27.44
2*12P	27.94	30.92	29.98
2*13P	30.48	33.46	32.52
2*14P	32.02	36.00	35.06
2*15P	35.56	38.54	37.60
2*16P	38.10	41.08	40.14
2*17P	40.64	43.62	42.86
2*18P	43.18	46.16	45.22
2*19P	45.72	48.70	47.76
2*32P	78.74	81.72	83.32

5X			
4X			
3X			
2X	Update Code options	Judyyan	20221102
1X	ORIGINAL	Apra	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY:	Apra
CHKD.:	Aaron
APPD.:	Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
X: ±	X': ±
X.X: ±0.25	X.X': ±
X.XX: ±0.15	X.XX': ±
X.XXX: ±0.05	X.XXX': ±

PART NO : H254300-XXP-A

DWG. NO.:

TITLE :

2.54mm Pitch Housing

DATE: 24-Nov-2017

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4