

RoHS Compliant

Specifications:
Material And Finish:
Insulator:PA 66 UL94V-0
Plated:See Ordering Information

Rating:
Current Rating:3.0Amp (22AWG)
Voltage Rating:250V AC/DC
Operating Temperature Range:-40°~+105°C




Electrical:
Contact resistance:10m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:1000V AC/Minute

Ordering Information

H2545-XXP-01-XA
1 2 34

- 1:—Series No.
2:—No.of Positions
3:—N:Natural
B:Bule/Black
4:—A:In Bag

Circuit 1

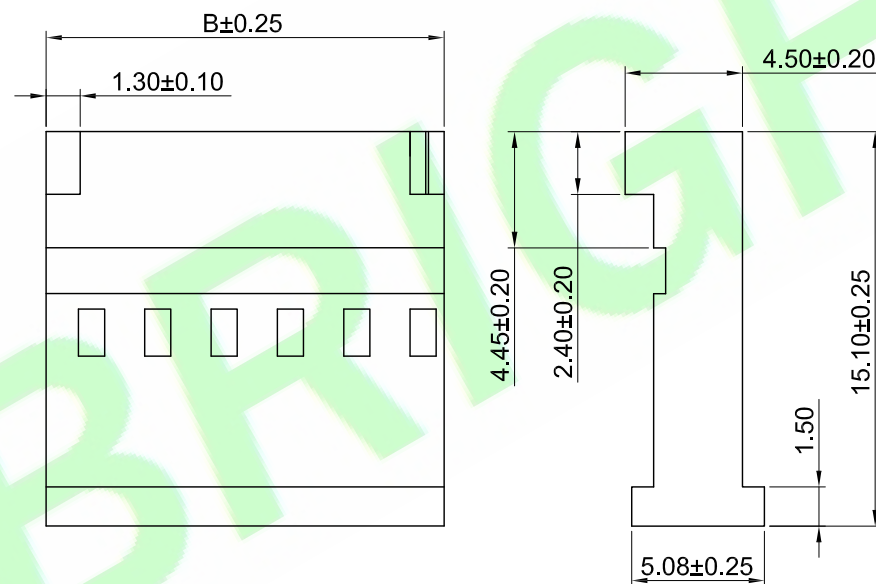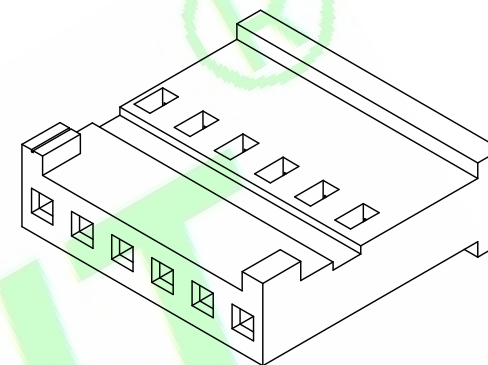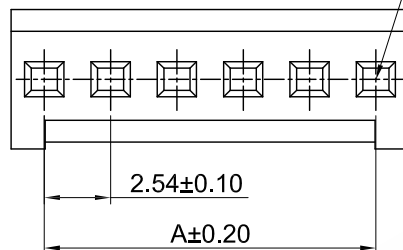


Ordering Information & Dimensions:

PART NO.	Dimensions	
	A	B
2P	2.54	5.08
3P	5.08	7.62
4P	7.62	10.16
5P	10.16	12.70
6P	12.70	15.24
7P	15.24	17.78
8P	17.78	20.32
9P	20.32	22.86
10P	22.86	25.40
12P	27.94	30.48
15P	35.56	38.10
18P	43.18	45.72

5X			
4X			
3X			
2X	Deng	20230602	
1X	Bruce		
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Bruce	GENERAL TOLERANCE:	
	LINEAR	ANGLES
CHKD.: Aaron	X.: ±0.30	X.X: ±
	X.XX: ±0.20	X.XX: ±
APPD.: Billy	X.XXX: ±0.10	X.XXX: ±

PART NO : H2545-XXP-01-XA	
DWG. NO.:	
TITLE : 2.54mm Pitch Housing	
DATE: 12-Jan-2022	

HJBRIGHT® 東莞市華晶電子有限公司		
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
SHEET: 1/1		
SCALE: 1:1		
UNIT: mm		
THIRD ANGLE PROJECTION		
A4		