

RoHS Compliant





Specifications:
Material And Finish:
Insulator:PA66 UL94V-0
Color:Natural

Rating:
Current Rating:3.0 Amp (22AWG)
Voltage Rating:250V AC/DC
Operating Temperature Range:-40°~+125°C

Electrical:
Contact resistance:20m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:1000V AC/Minute

Ordering Information
H254800-10P-01-A
1 2 3

1: — Series No.
2: — No. of Positions
3: — A:In bag

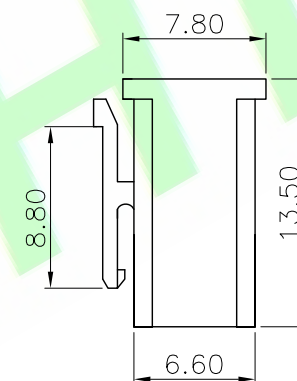

5X				DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : H254800-10P-01-A	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X					LINEAR ANGLES		DWG. NO.:			
3X				CHKD.: Tony	x.: ±0.40	x': ±5.0°	TITLE : 2.54mm Pitch Housing	SHEET: 1/1		A 4
2X	Update Code options	Judyyan	20221215		x.x: ±0.30	x.x': ±3.0°		SCALE: 1:1		
1X	ORIGINAL	Samson		x.xx: ±0.20	x.xx': ±2.0°	UNIT: mm				
REV.	DESCRIPTION	DR.BY	ECN. NO.	APPD.: Billy	x.xxx: ±0.10	x.xxx': ±1.0°	DATE: 15-Sep-2021	THIRD ANGLE PROJECTION		