

Specifications:

Material:

Insulator:PA66 UL94V-0

Rating:

Current Rating:8A AC/DC

Voltage Rating:250V AC/DC


Operating Temperature Range:-25°C~+85°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:800V AC/Minute

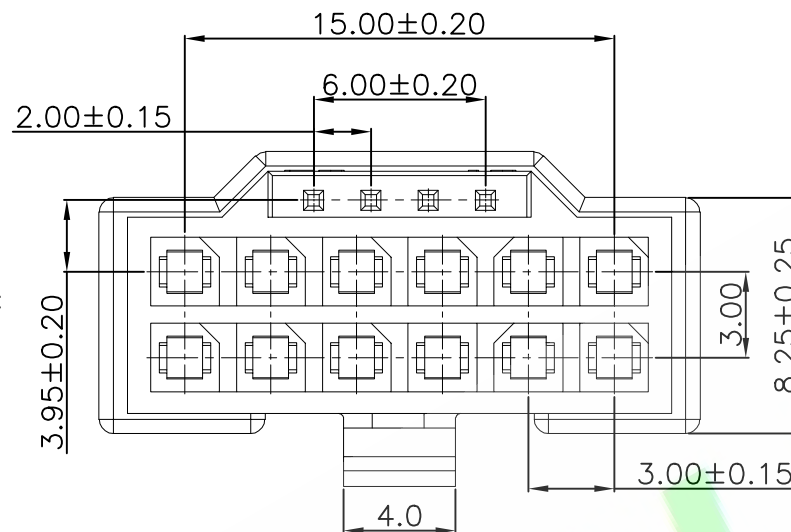

Ordering Information

H30002M-16P-01-BA

1 2 3 45



1:— Series No.

2:— M:Male

3:— No. of Positions

4:— B:Black

5:— A:In Bag

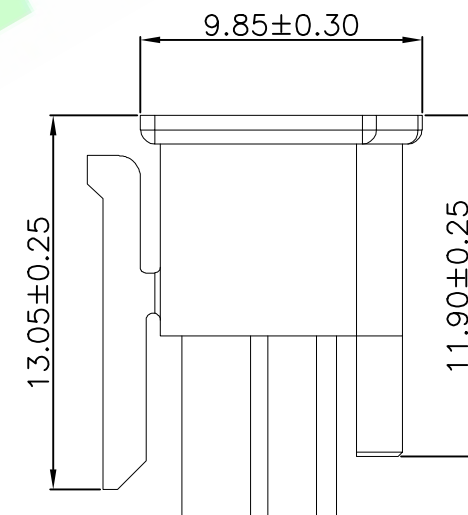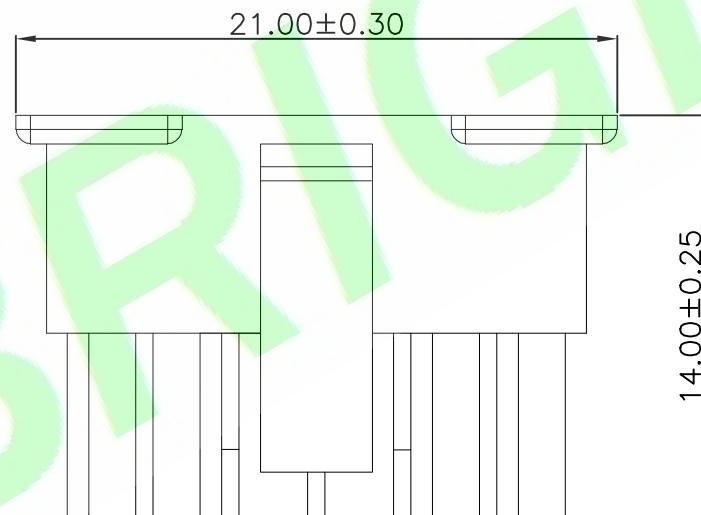

1X	ORIGINAL	Jamin	
REV.	DESCRIPTION	DR.BY	ECN. NO

DR.BY.: Jamin	GENERAL TOLERANCE:		PART NO : H30002M-16P-01-BA
	LINEAR	ANGLES	
CHKD.: Judyyan	X.: ±0.25	X': ±3.0°	DWG. NO.: TITLE : 3.00&2.00mm Pitch Housing
	X.X: ±0.20	X.X': ±2.0°	
APPD.: Billy	X.XX: ±0.20	X.XX': ±1.0°	DATE: 14-May-2023
	X.XXX: ±0.05	X.XXX': ±0.5°	

HJBRIGHT® 东莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4