

Specifications:**Material And Finish:**

Insulator:PBT ,Color:Black

Rating:

Current Rating:22.0 Amp

Voltage Rating:14V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:8m Ohm Max

Insulator resistance:100M ohm min.

Withstanding Voltage:1000V AC/Minute

Ordering Information**H35000F-08P-01-A**






1 2 3 4

1: — Series No.

2: — F:Female

3: — No. of Positions

4: — A:In Bag

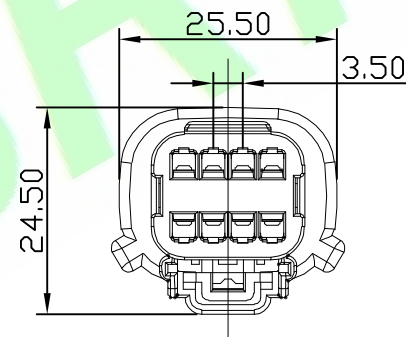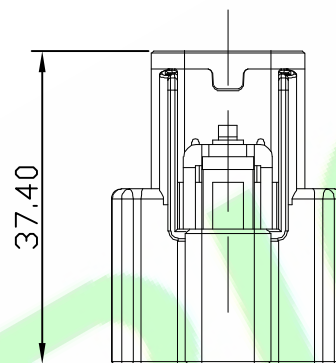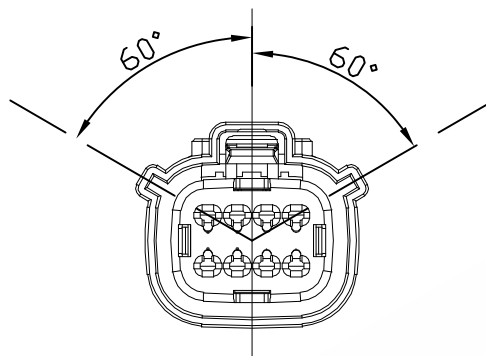

Abbreviation	Description	Color	Material
A Type Housing	Housing,Keying Optiong A	Black	PBT
Grommet Cap	Grommet Cap(Open)	Black	PBT
Plr	Plr	Natural	PBT
Cap	Cap	Red	PBT
Mat seal	Mat seal	Blue	Silicone
RR	RR	Red	Silicone

5X			
4X			
3X			
2X			
1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Judyyan
CHKD.: Aren
APPD.: Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ±5.0°	X.X: ±5.0°
X.X: ±0.30	X.XX: ±3.0°
X.XX: ±0.20	X.XXX: ±2.0°
X.XXX: ±0.10	X.XXXX: ±1.0°

PART NO : H35000F-08P-01-A

DWG. NO.:

TITLE :

MX150 Rcpt Dual Row Sealed
Assembly Mat Seal Female

DATE: 14-Nov-2022

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4