

Specifications:**Material And Finish:**

Contact: Copper alloy

Rating:

Current Rating: 22 Amp (16AWG)

Voltage Rating: 14V AC/DC

Operating Temperature Range: $-40^{\circ}\sim+125^{\circ}\text{C}$ **Electrical:**

Contact resistance: 8m Ohm Max

Wire Gauge: #16~20AWG

Ordering InformationH35000TF-PX

1 23 4


1: — Series No.


2: — T: Terminal

3: — F: Female

4: — A: Gold Flash

Q: Tin Plated

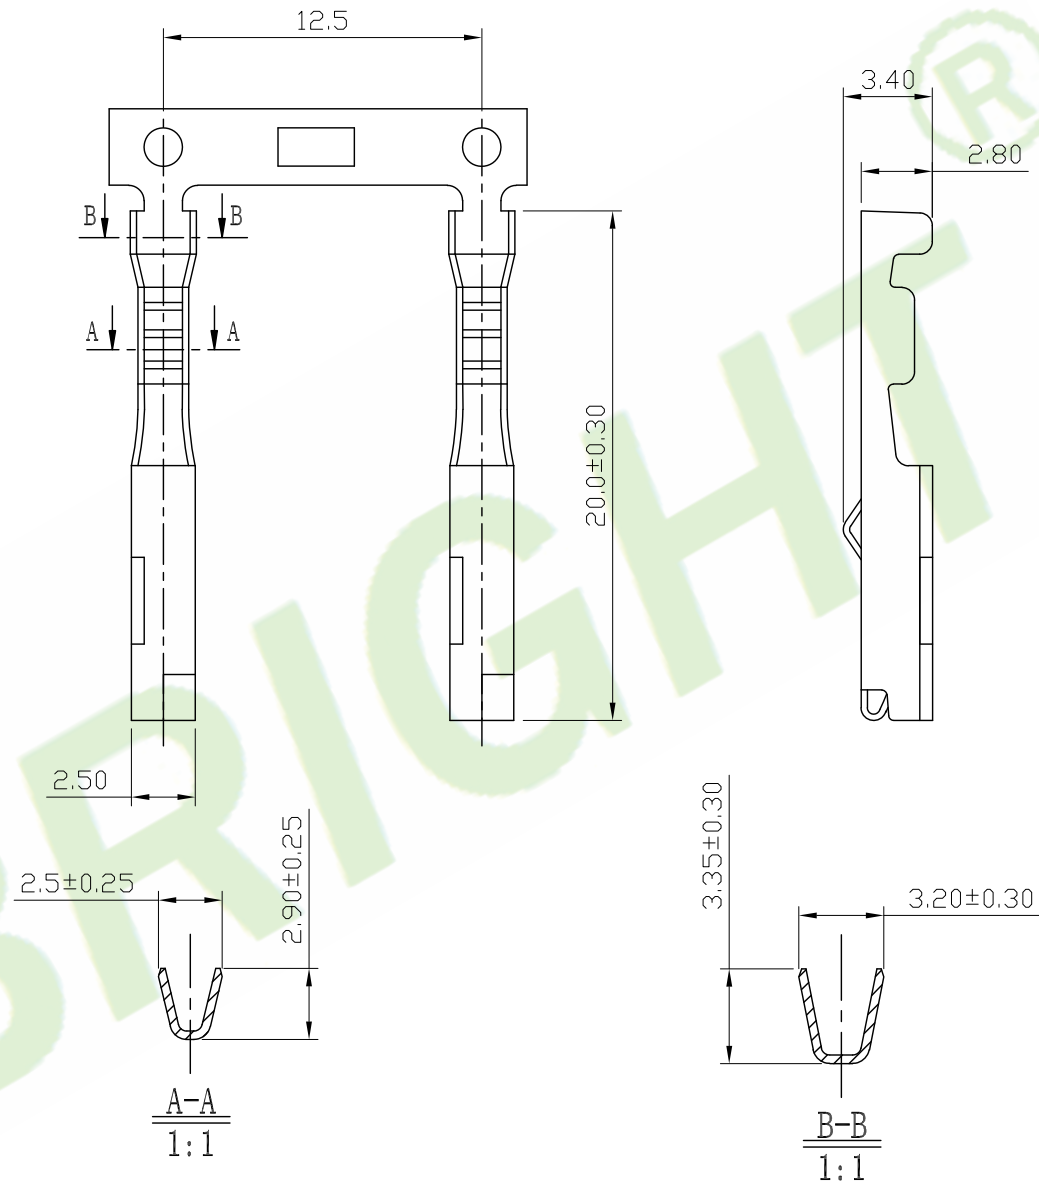

5X				DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : H35000TF-PX	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
4X					LINEAR	ANGLES	DWG. NO.:		
3X				CHKD.: Aren	X.:	X': $\pm 5.0^{\circ}$	TITLE :	SHEET: 1/3	 THIRD ANGLE PROJECTION
2X					X.X: ± 0.30	X.X': $\pm 3.0^{\circ}$	MX150 Rcpt 3.5 Pitch Terminal Female	SCALE: 1:1	
1X	ORIGINAL	Judyyan		APPD.: Billy	X.XX: ± 0.20	X.XX': $\pm 2.0^{\circ}$	DATE: 14-Nov-2022	UNIT: mm	
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XXX: ± 0.10	X.XXX': $\pm 1.0^{\circ}$			A4