

RoHS Compliant





Specifications:
Material And Finish:
Insulator:PA66 UL94V-0 Color:Natural

Rating:
Current Rating:1.0 Amp
Voltage Rating:1400V AC/DC
Operating Temperature Range:-40°~+105°C

Electrical:
Contact resistance:10m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:3800V AC/Minute

Ordering Information	
H3500F-XXP-01-XX	
<u>1</u>	<u>45</u>

1:——— Series No.
2:——— F:Female
3:——— No. of Positions
4:——— N:Natural
 W:White
5:——— A:In Bag
 C:In Tray

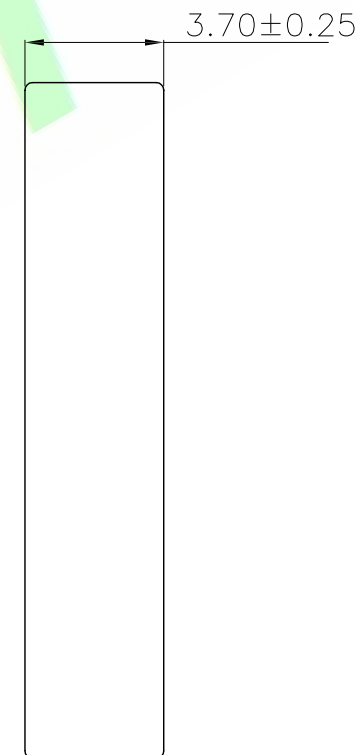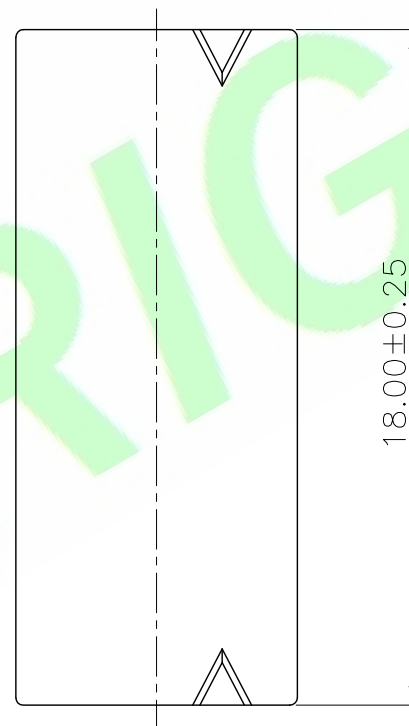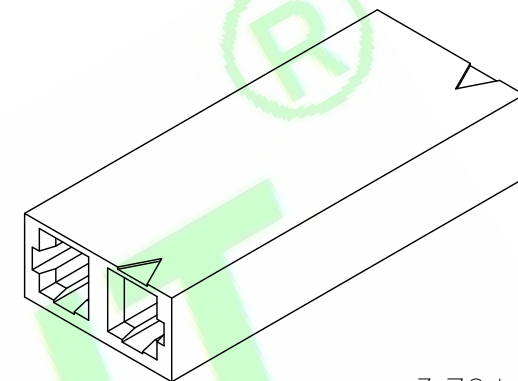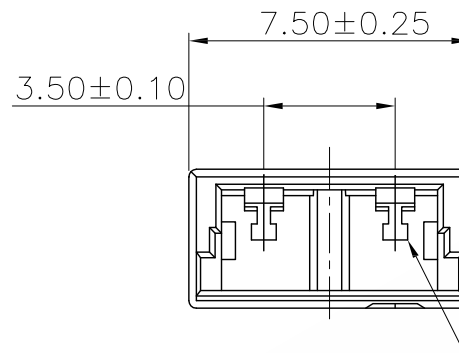

5X				DR.BY.: Tsw	GENERAL TOLERANCE:		PART NO :H3500F-XXP-01-XX		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X					LINEAR	ANGLES	DWG. NO.:				
3X				CHKD.: Aren	x.: x.x:	x": x.x":	TITLE :				
2X					x.xx: ±0.35	x.xxx: ±0.10	3.5mm Series Female connector		SHEET: 1/1		 THIRD ANGLE PROJECTION
1X	ORIGINAL	Tsw		APPD.:	x.xx: ±0.25	x.xxx: ±0.10	DATE: 30-Aug-2021		SCALE: 1:1		
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy					UNIT: mm		