

RoHS Compliant

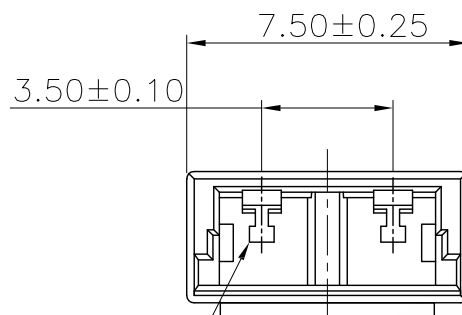
Specifications:
Material And Finish:
Insulator:PA66 UL94V-0 Color:Natural

Rating:
Current Rating:1.0 Amp
Voltage Rating:1400V AC/DC
Operating Temperature Range:-40°~+105°C

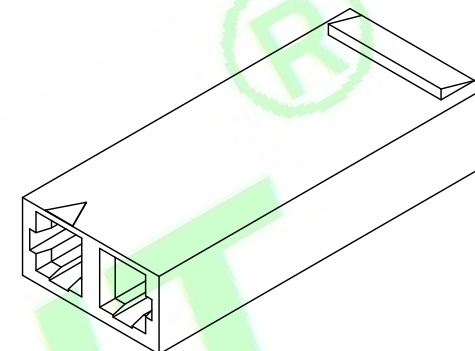
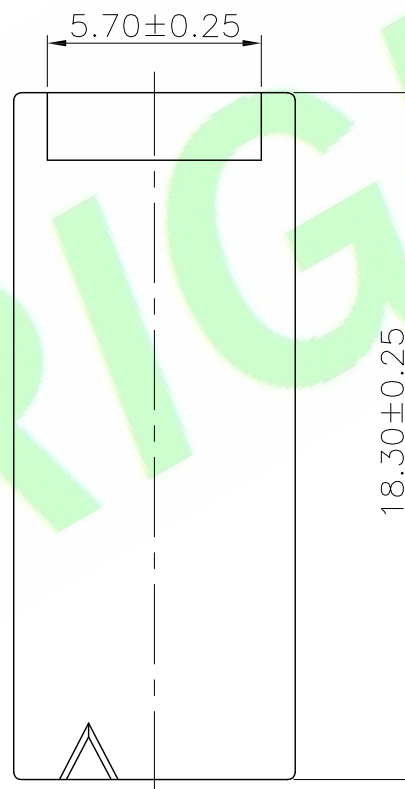
Electrical:
Contact resistance:10m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:3800V AC/Minute

Ordering Information
H3500F–XXP–02–XX
 1 2 3 45

- 1:——— Series No.
2:——— F:Female
3:——— No. of Positions
4:——— N:Natural
 W:White
5:——— A:In Bag
 C:In Tray



Circuit 1-

 3.50 ± 0.25

5X				DR.BY.: Tsw	GENERAL TOLERANCE:		PART NO : H3500F-XXP-02-XX		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
4X					LINEAR	ANGLES	DWG. NO.:					
3X				CHKD.: Aren	x.: x.x:	x": x.x":	TITLE : 3.5mm Series Female connector		SHEET: 1/1			A4
2X					x.x: ±0.35	x.x":			SCALE: 1:1			
1X	ORIGINAL	Tsw		APPD.:	x.xx: ±0.25	x.xxx":	DATE: 30-Aug-2021		UNIT: mm			
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.10	x.xxx":						