

Specifications:**Material:**

Insulator: PBT UL94V-0 Color: White

Rating:

Current Rating: 10.0Amp(18AWG)

Voltage Rating: 12V~250V AC/DC



Operating Temperature Range: -30°~+105°C

Electrical:

Contact resistance: 10m Ohm Max

Insulator resistance: 100M ohm min.

Withstanding Voltage: 1800V AC/Minute

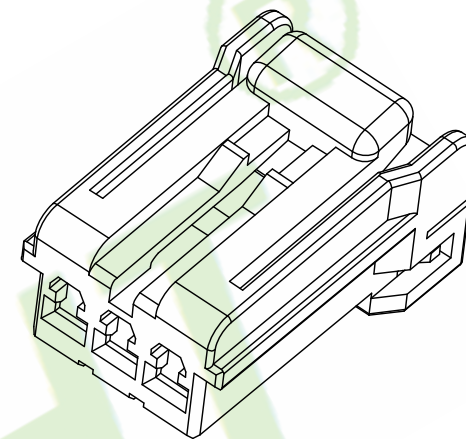
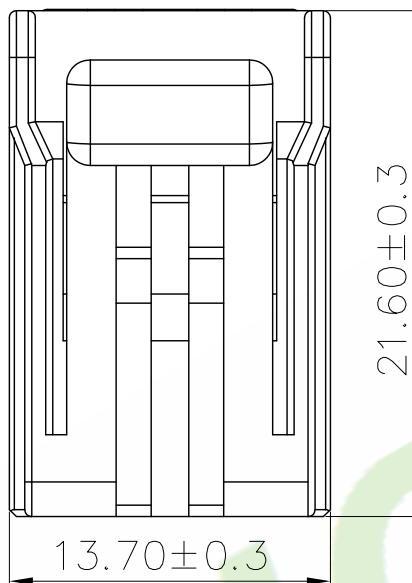
**Ordering Information**H3501-03P-A

1 2 3

1: — Series No.

2: — No. of Positions

3: — A: In Bag

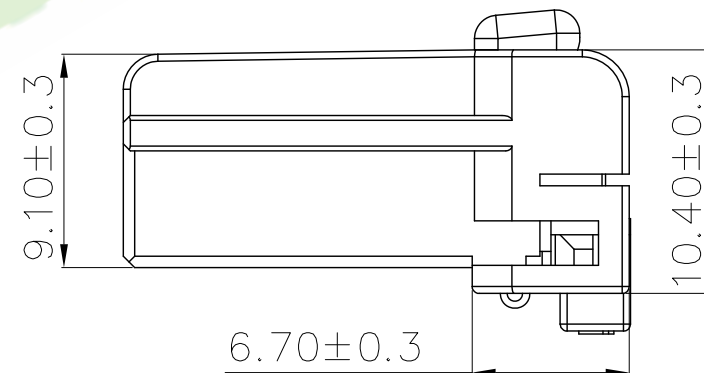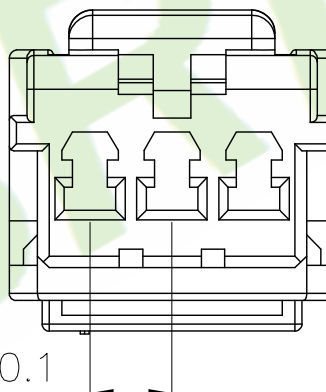

35011-3P-1	PA66	WHITE
PART NUMBER	MATERIAL	COLOR
	HOUSING	

5X				DR.BY:	
4X				Apra	
3X				CHKD.:	
2X	Update code options	Judyyan	20220725	Aaron	
1X	ORIGINAL	Apra		APPD.:	
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	

GENERAL TOLERANCE:		PART NO : H3501-03P-A
LINEAR	ANGLES	
X: ±3.0°	X.X: ±0.30	DWG. NO.:
X.XX: ±0.20	X.XX: ±1.0°	TITLE :
X.XXX: ±0.10	X.XXX: ±0.5°	H3501 Series Female Housing
		DATE: 16-Nov-2017

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHE-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm

THIRD ANGLE PROJECTION

A4