

RoHS Compliant

Specifications:

Material:

Insulator:PBT UL94V-0 Color White

Rating:

Current Rating:10.0Amp(18AWG)

Voltage Rating:12V~250V AC/DC

Operating Temperature





Range:-30°~+105°C

Electrical:

Contact resistance:10m Ohm Max

Insulator resistance:100M ohm min.

Withstanding Voltage:1800V AC/Minute

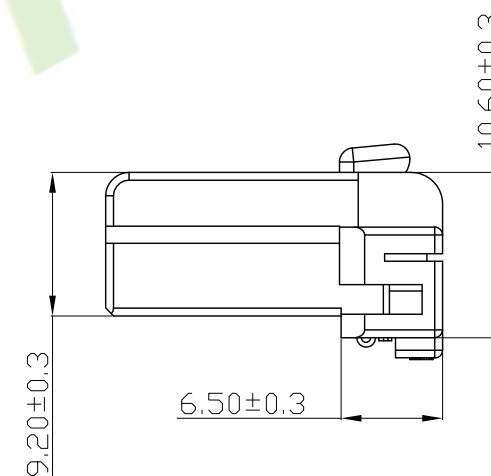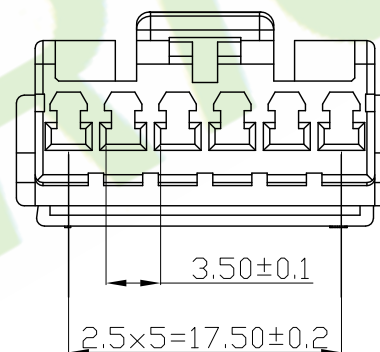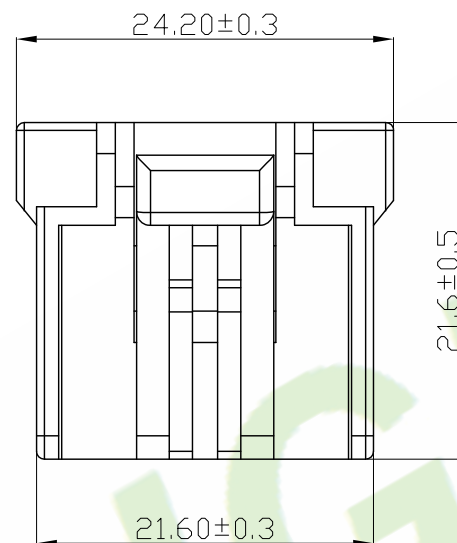

Ordering Information


H3501-06P-A

1 2 3

1: — Series No.

2: — No. of Positions

3: — A:In Bag

5X				DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : H3501-06P-A	HJBRIGHT® 东莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
4X					LINEAR	ANGLES	DWG. NO.:		
3X				CHKD.: Tony	X.: ±0.30	X': ±3.0°	TITLE :	SHEET: 1/1	 THIRD ANGLE PROJECTION
2X	Update code options	Judyyan	20220725	APPD.: Billy	X.X: ±0.20	X.X': ±1.0°	H3501 Series Female Housing	SCALE: 1:1	
1X	ORIGINAL	Samson			X.XX: ±0.10	X.XX': ±0.5°	DATE: 02-Oct-2014	UNIT: mm	
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XXX: ±0.10	X.XXX': ±			A4