

Specifications:**Material:**

Insulator: PBT UL94V-0 Color: White

Rating:

Current Rating: 10Amp(18AWG)

Voltage Rating: 12V~250V AC/DC


Operating Temperature Range: -30~+105°C

Electrical:

Contact resistance: 10m Ohm Max

Insulator resistance: 100M ohm min.

Withstanding Voltage: 1800V AC/Minute


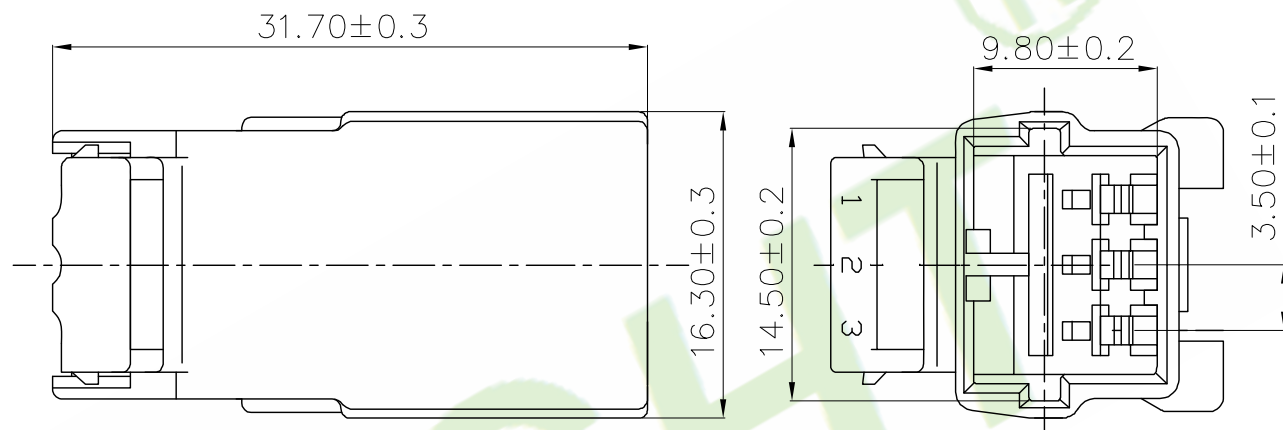
**Ordering Information****H3502-03P-A**

1 2 3

1: —Series No.

2: —No. of Positions

3: —A: In Bag

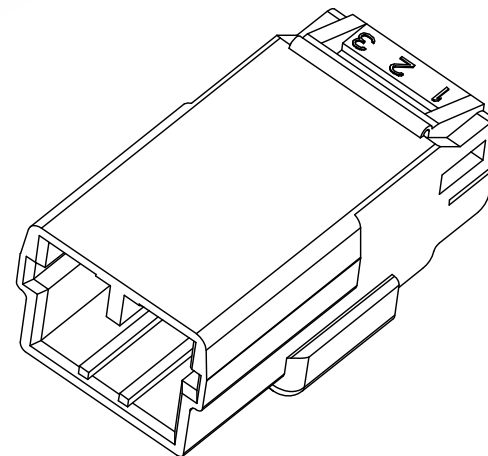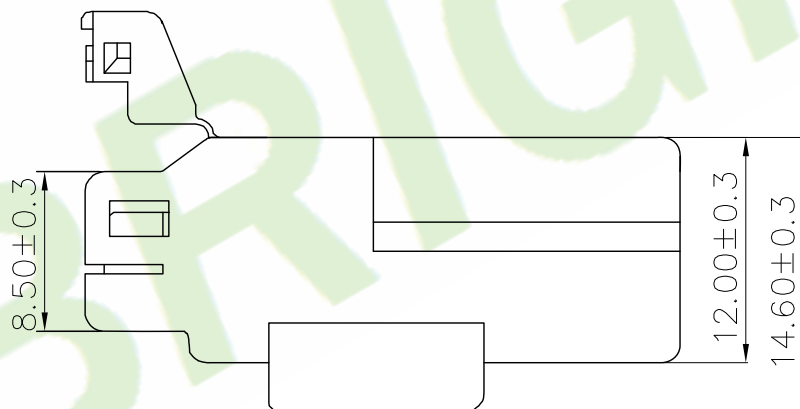

5X				DR.BY.: Apra	GENERAL TOLERANCE:		PART NO : H3502-03P-A		HJBRIGHT® 东莞市華晶電子有限公司 BRIGHE-E ELECTRONIC TECHNOLOGY LIMITED		
4X					LINEAR	ANGLES	DWG. NO.:				
3X					CHKD.:	x.: x.x: ±0.30 x.xx: ±0.20 x.xxx: ±0.10	x*: ±3.0° x.x*: ±1.0° x.xx*: ±0.5° x.xxx*: ±	TITLE : H3502 Series Female Housing			
2X	Update code options	Judyyan	20220725	Aaron	APPD.:		DATE: 16-Nov-2017		SHEET: 1/1		A4
1X	ORIGINAL	Apra						SCALE: 1:1			
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy				UNIT: mm	THIRD ANGLE PROJECTION		