



Specifications:
Material And Finish:
Insulator:Nylon 66 UL94V-0

Rating:
Operating Temperature Range:-40°C~+105°C


Electrical:
Insulator resistance:1000M ohm min.




2 CKT




3 CKT




4 CKT



5 CKT



6 CKT



7 CKT






8 CKT

Ordering Information

H3506-XXK-XX-A

1 2 3 4

- 1: — Series No.
2: — No. of Positions
3: — 01: A Type Black
02: B Type Natural
4: — A:In Bag

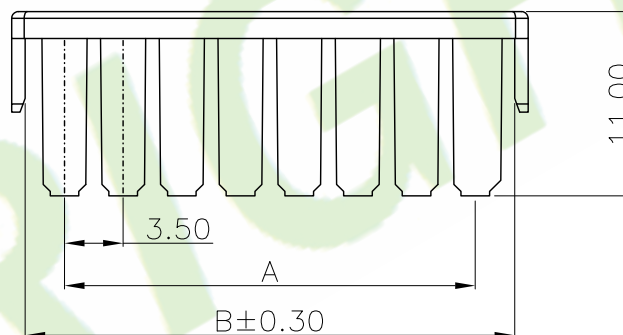

No.	Dimension mm	
	A	B
2	3.50	8.20
3	7.00	11.70
4	10.50	15.20
5	14.00	18.70
6	17.50	22.20
7	21.00	25.70
8	24.50	29.20

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : H3506-XXK-XX-A	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X				Judyyan	LINEAR	ANGLES	DWG. NO.:			
3X				CHKD.:	x.:	x*: ±5.0°	TITLE : 3.5mm Pitch retainer pin	SHEET: 1/1		A4
2X				Aren	x.x: ±0.40	x.x*: ±3.0°		SCALE: 1:1		
1X	ORIGINAL	Judyyan		APPD.:	x.xx: ±0.25	x.xx*: ±2.0°		UNIT: mm		
REV	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.15	x.xxx*: ±1.0°	DATE: 11-Jul-2021			