

Specifications:

Material:

Insulator:PBT UL94V-0 Color: Black

Rating:

Current Rating:10.0Amp

Voltage Rating:14V AC/DC

Operating Temperature Range:-40~+85°C

Electrical:

Contact resistance:10m Ohm Max

Insulator resistance:100M ohm min.

Dielectric Strength:1000V AC at 50 Hz
or 60 Hz/1600V DC

Ordering Information

H3509F-02P-01-A






1 2 3 4

1: — Series No.




2: — F:Female

3: — No. of Positions

4: — A:In Bag

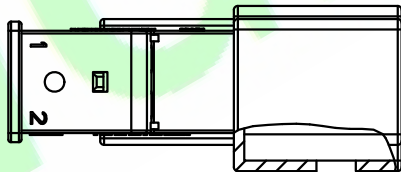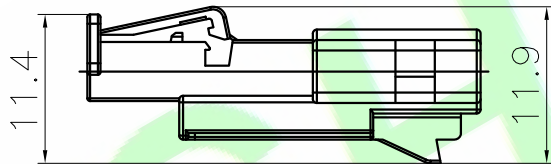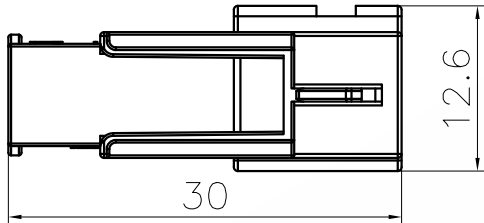


B-B

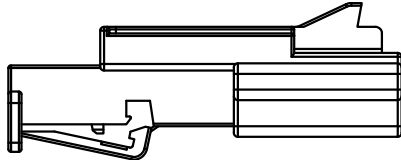

DR.BY.: Annie	GENERAL TOLERANCE:		PART NO : H3509F-02P-01-A	
	LINEAR	ANGLES	DWG. NO.:	
	x.:	x': ±1.0°	TITLE :	
	x.x: ±0.30	x.x':	H3509 Series Female Housing	
	x.xx: ±0.20	x.xx':	DATE: 11-Dec-2024	
CHKD.: Judyyan	x.xxx: ±0.10	x.xxx':		
APPD.: Billy				

HJBRIGHT® 东莞市華晶電子有限公司
BRIGHE-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



A4

1X	ORIGINAL	Annie	
REV.	DESCRIPTION	DR.BY	EDL NO.