

RoHS Compliant

Specifications:**Material And Finish:**

Insulator:PBT UL94V-0
Plated:See Ordering Information

Rating:

Current Rating:10.0 Amp (16AWG)
Voltage Rating:630V AC/DC
Operating Temperature Range:-55°~+105°C





Electrical:

Contact resistance:10m Ohm Max
Insulator resistance:1000M Ohm min.
Withstanding Voltage:1500V AC/Minute

Ordering InformationH39610F-XXP-XA

1 2 3 4 5

- 1:—Series No.
2:—F:Female
3:—No. of Positions
4:—Color:B—Black
W—White
5:—A:In Bag

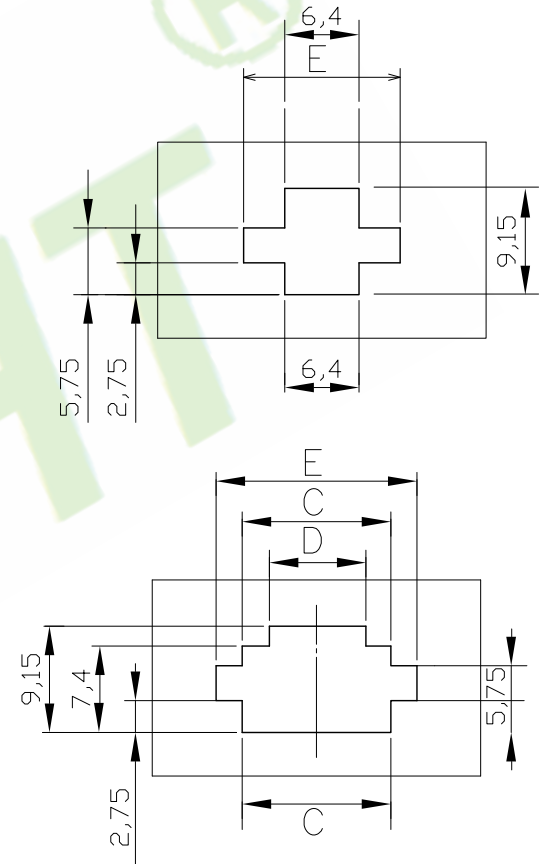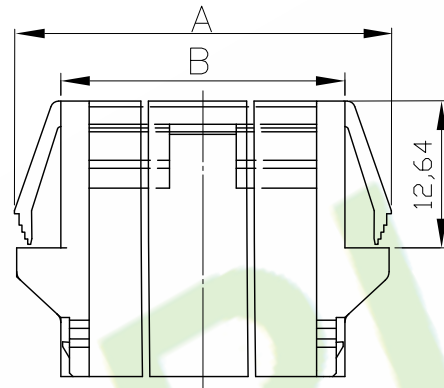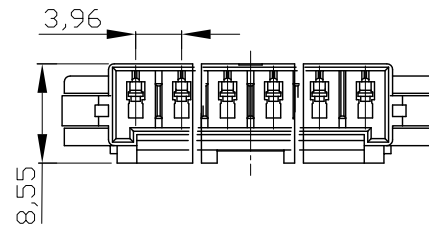

PIN	Dimension mm			
	A	B	C	D
01	14.20	6.20		
02	16.66	8.66	8.86	4.96
03	20.62	12.62	12.82	8.32
04	24.58	16.58	16.78	12.28
05	28.54	20.54	20.74	16.24
06	32.50	24.50	24.70	20.20

5X				DR.BY.: Deng	GENERAL TOLERANCE:		PART NO : H39610F-XXP-XA		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X						LINEAR	ANGLES				
3X				CHKD.:	X.: ±0.30	X': ±5.0°	TITLE : 3.96mm Pitch Female Housing		SHEET: 1/1		A4
2X				Aren	X.X: ±0.20	X.X': ±3.0°			SCALE: 1:1		
1X	ORIGINAL	Deng		APPD.:	X.XX: ±0.15	X.XX': ±2.0°			UNIT: mm		
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	X.XXX: ±0.10	X.XXX': ±1.0°	DATE: 17-May-2023		THIRD ANGLE PROJECTION		