

RoHS Compliant

Specifications:

Material And Finish:

Insulator:PBT UL94V-0 Color:Black

Contact:Copper alloy

Plated:See Ordering Information

Rating:

Current Rating:15 Amp Max

Voltage Rating:250V AC/DC

Operating Temperature Range:-55°~+105°C

Electrical:

Contact resistance:10m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:1500V AC/Minute

Ordering Information

H38101-XXP-XX-A

1 2 3 4 5

1:—Series No.







2:—No. of Positions

3:—P:PBT


4:—01:X-KEY Type

02:Y-KEY Type


5:—A:In Bag

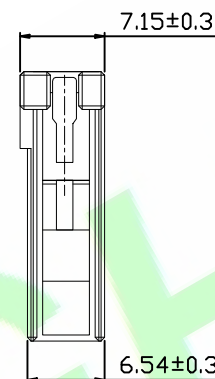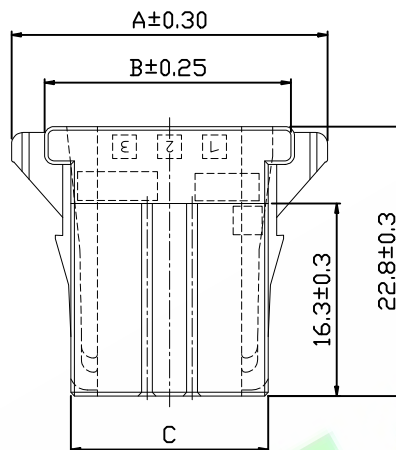


X-KEY Type 3P




Y-KEY Type 3P




X-KEY Type 4P



Y-KEY Type 4P




X-KEY Type 5P、6P、8P、10P



Y-KEY Type 6P、10P

KEYING LOCATION

5X				DR.BY.: Judyyan	GENERAL TOLERANCE: LINEAR X.: ±0.30 X.X: ±0.20 X.XX: ±0.15 X.XXX: ±0.10	ANGLES X°: ±5.0° X.X°: ±3.0° X.XX°: ±2.0° X.XXX°: ±1.0°	PART NO : H38101-XXP-XX-A DWG. NO.: TITLE : 3.81mm Pitch Housing DATE: 25-Aug-2023	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
4X				CHKD.: Aren					
3X				APPD.: Billy				SHEET: 1/1	 THIRD ANGLE PROJECTION
2X								SCALE: 1:1	
1X	ORIGINAL	Judyyan						UNIT: mm	
REV.	DESCRIPTION	DR.BY	ECN. NO.						A4