

RoHS Compliant

Specifications:**Material And Finish:**

Insulator:PBT UL94V-0

Rating:

Current Rating:10.0 Amp (16AWG)

Voltage Rating:630V AC/DC

Operating Temperature Range:-55~+105°C

Electrical:

Contact resistance:10m Ohm Max

Insulator resistance:1000M Ohm min.

Withstanding Voltage:1500V AC/Minute

Ordering Information**H39610M-XXP-01-XA**

1 2 3 4 5





1: — Series No.

2: — M:Male

3: — No. of Positions

4: — Color: B-Black
W-White

5: — A:In Bag

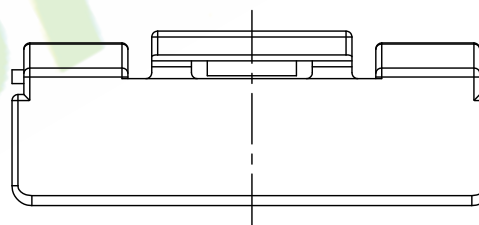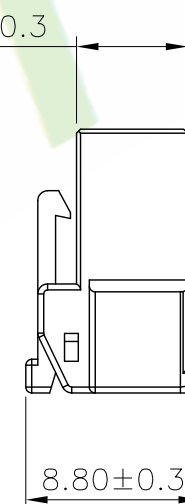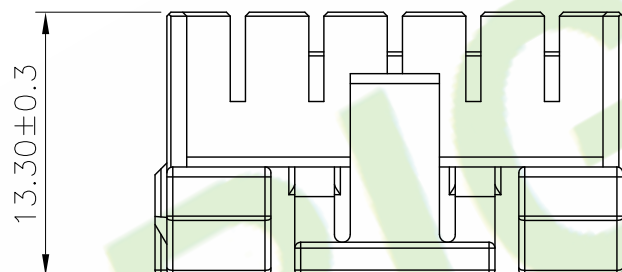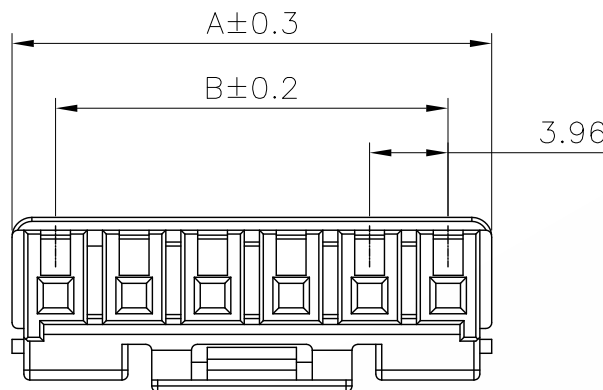

PIN	Dimension mm	
	A	B
01	6.20	
02	8.36	3.96
03	12.32	7.92
04	16.28	11.88
05	20.24	15.84
06	24.20	19.80

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : H39610M-XXP-01-XA	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		SHEET: 1/1		A4
4X				PIP	LINEAR	ANGLES	DWG. NO.:					
3X				CHKD.:	X.: ±0.30	X': ±5.0°	TITLE :	3.96mm Pitch Housing		SCALE: 1:1	THIRD ANGLE PROJECTION	
2X				Aren	X.X: ±0.20	X.X': ±3.0°				UNIT: mm		
1X	ORIGINAL	PIP		APPD.:	X.XX: ±0.15	X.XX': ±2.0°	DATE: 26-Jun-2020					
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	X.XXX: ±0.10	X.XXX': ±1.0°						