

RoHS Compliant



Specifications:
Material And Finish:
Contact: COPPER ALLOY
Plated: See Ordering Information


Rating:
Current Rating: 10.0 Amp (16AWG)
Voltage Rating: 630V AC/DC

Electrical:
Contact resistance: 10m Ohm Max
Insulator resistance: 1000M Ohm min.
Withstanding Voltage: 1500V AC/Minute
Wire Range: #16~22AWG

Ordering Information
H39610TM-PX
1 23 4

1: — Series No.
2: — T: Terminal
3: — M: Male
4: — A: Gold Flash
Q: Tin Plated

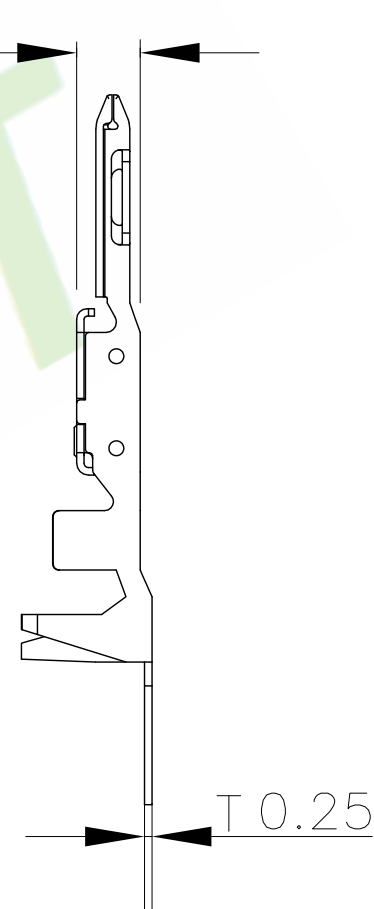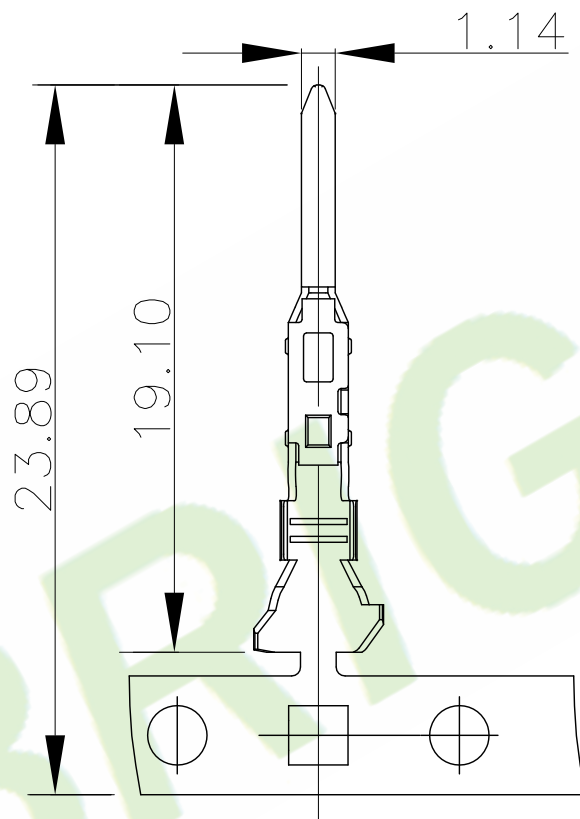

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : H39610TM-PX	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			 THIRD ANGLE PROJECTION	A4
4X				Deng	LINEAR	ANGLES	DWG. NO.:					
3X				CHKD.:	x.: ±0.30	x*: ±5.0°	TITLE : 3.96mm Pitch Male Terminal	SHEET: 1/1				
2X				Aren	x.x: ±0.20	x.x*: ±3.0°		SCALE: 1:1				
1X	ORIGINAL	Deng		APPD.:	x.xx: ±0.15	x.xx*: ±2.0°		UNIT: mm				
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.10	x.xxx*: ±1.0°	DATE: 18-May-2023					