
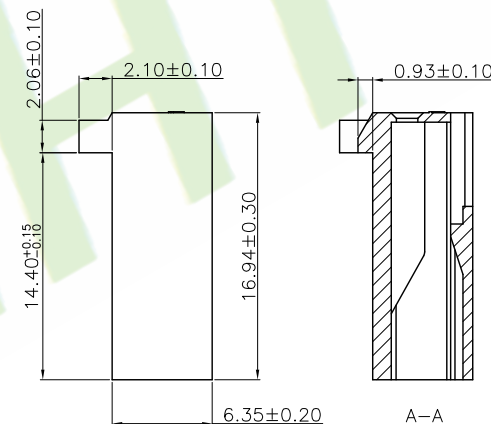
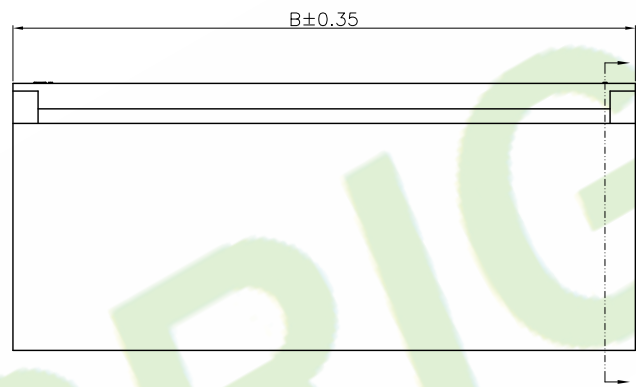
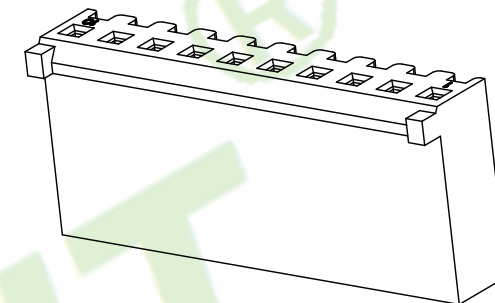


RoHS Compliant

Specifications:
Material And Finish:
Insulator:PA66 UL94V-0 Color: Natural

Rating:
Current Rating:6.0 Amp(18AWG)
Voltage Rating:250V AC/DC
Operating Temperature Range:-40°~+105°C

Electrical:
Contact resistance:10m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:2000V AC/Minute


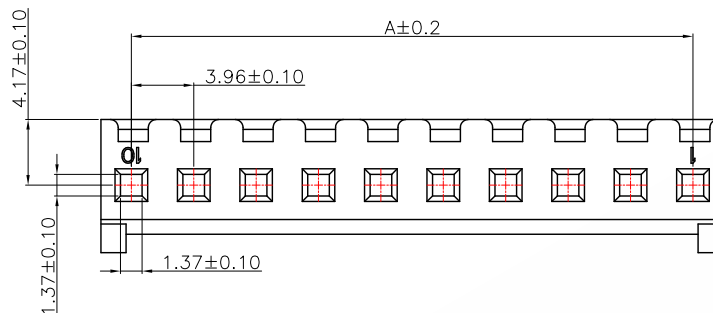


Ordering Information

H3964-XX-XX-A

1 2 3 4

- 1: — Series No.
2: — No. of Positions
3: — 01:without buckle
02:with buckle
4: — A:In bag

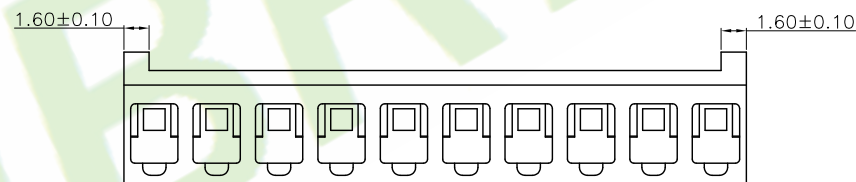


Circuits	Dimensions	
	A	B
02	3.96	7.82
03	7.92	11.78
04	11.88	15.74
05	15.84	19.70
06	19.80	23.66
07	23.76	27.62
08	27.72	31.58
09	31.68	35.54
10	35.64	39.50
11	39.60	43.46
12	43.56	47.42
13	47.52	51.38
14	51.48	55.34
15	55.44	59.30
16	59.40	63.26

5X			
4X			
3X			
2X			
1X	ORIGINAL	Mark	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.:	GENERAL TOLERANCE:	
Mark	LINEAR	ANGLES
CHKD.:	X.: ±5.0°	X.X: ±3.0°
Tony	X.XX: ±0.05	X.XX*: ±2.0°
APPD.:	X.XXX: ±0.02	X.XXX*: ±1.0°
Billy		

PART NO : H3964-XX-XX-A
DWG. NO.:
TITLE : 3.96mm Pitch Housing
DATE: 30-Mar-2022

HJBRIGHT® 東莞市華晶電子有限公司	
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
SHEET: 1/1	
SCALE: 1:1	
UNIT: mm	
THIRD ANGLE PROJECTION	

A4

A4