

Specifications:
Material And Finish:
Insulator: Phosphor Bronze

Rating:
Current Rating: 10.0Amp (16AWG)

Electrical:
Contact resistance: 10m Ohm Max
Insulator resistance: 1000M ohm min.
Withstanding Voltage: 1500V AC/Minute
Wire Range: AWG#16~22


Ordering Information

H3966T-PX-XX

1 2 3 4

- 1: — Series No.
2: — T: Terminal
3: — Q: Tin Plated
S: Matte Tin Plated
4: — 01: 16~20AWG
02: 18~22AWG

No.	Wire Range	A	B
01	16~20AWG	2.93	2.90
02	18~22AWG	2.30	2.60

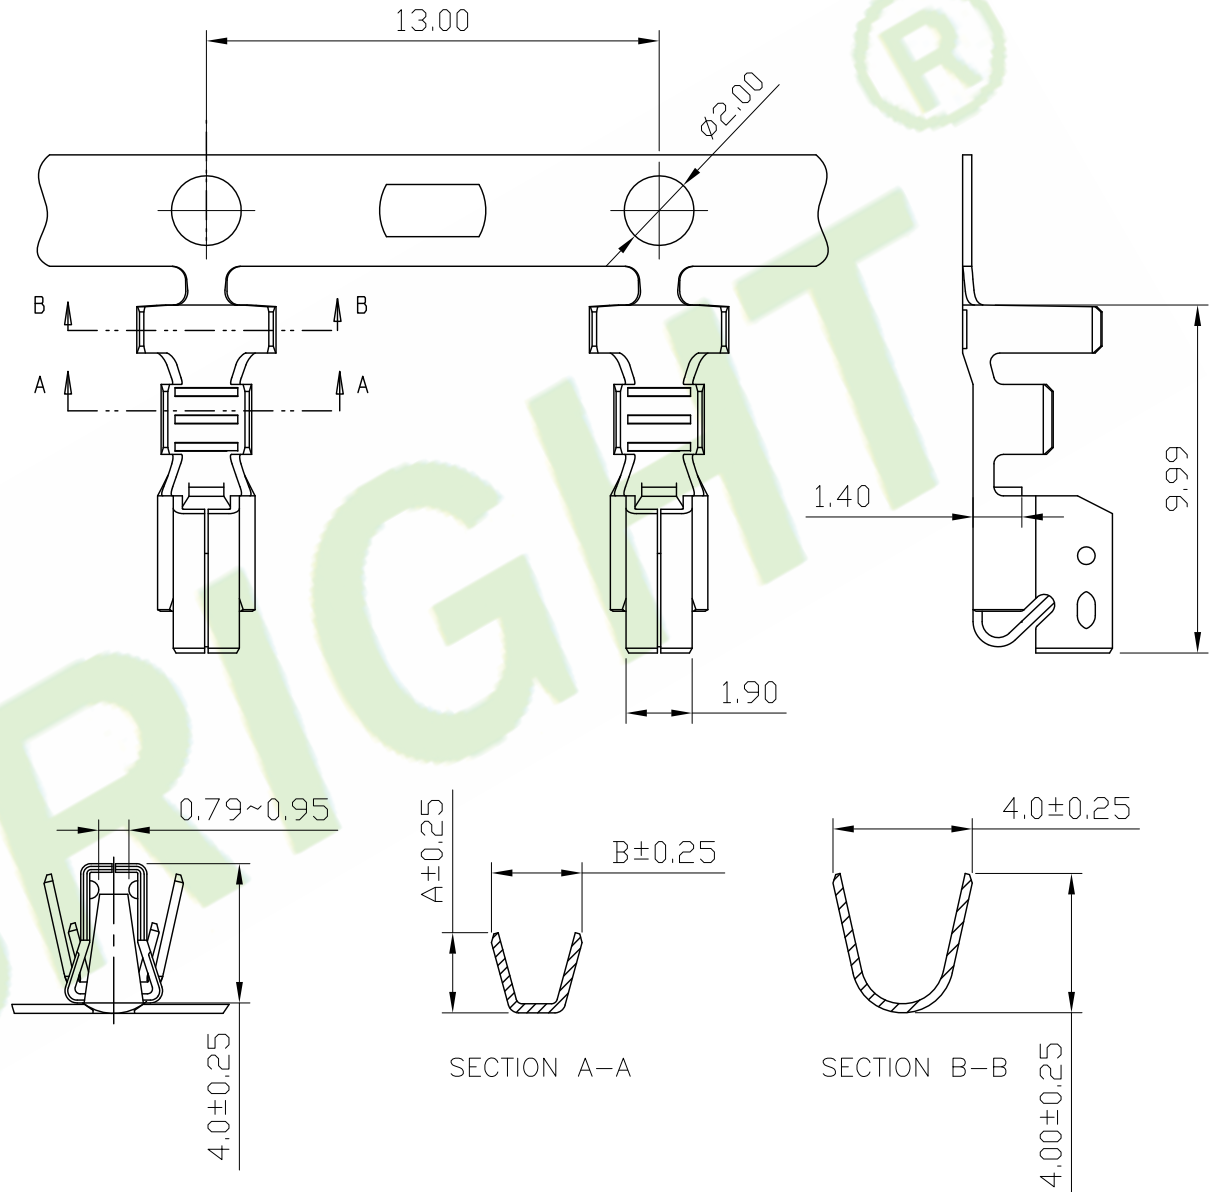

5X				DR.BY:	GENERAL TOLERANCE:		PART NO : H3966T-PX-XX	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		SHEET: 1/1	THIRD ANGLE PROJECTION	A4
4X				Judyyan	LINEAR	ANGLES	DWG. NO.:					
3X				CHKD:	X.: ±0.30	X': ±5.0°	TITLE :	3.96mm Pitch Dynmic Terminal		SCALE: 1:1		
2X				Aren	X.X: ±0.25	X.X': ±3.0°	DATE: 30-Sep-2021			UNIT: mm		
1X	ORIGINAL	Judyyan		APPD:	X.XX: ±0.20	X.XX': ±2.0°						
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	X.XXX: ±0.15	X.XXX': ±1.0°						