

Specifications:

Material And Finish:

Terminal: Phosphor Bronze

Rating:

Current Rating: 7.0 Amp (18AWG)

Voltage Rating: 250V AC/DC


Operating Temperature Range: $-40^{\circ}\sim+105^{\circ}\text{C}$

Electrical:

Contact resistance: 10m Ohm Max

Insulator resistance: 1000M ohm min.

Withstanding Voltage: 1500V AC/Minute

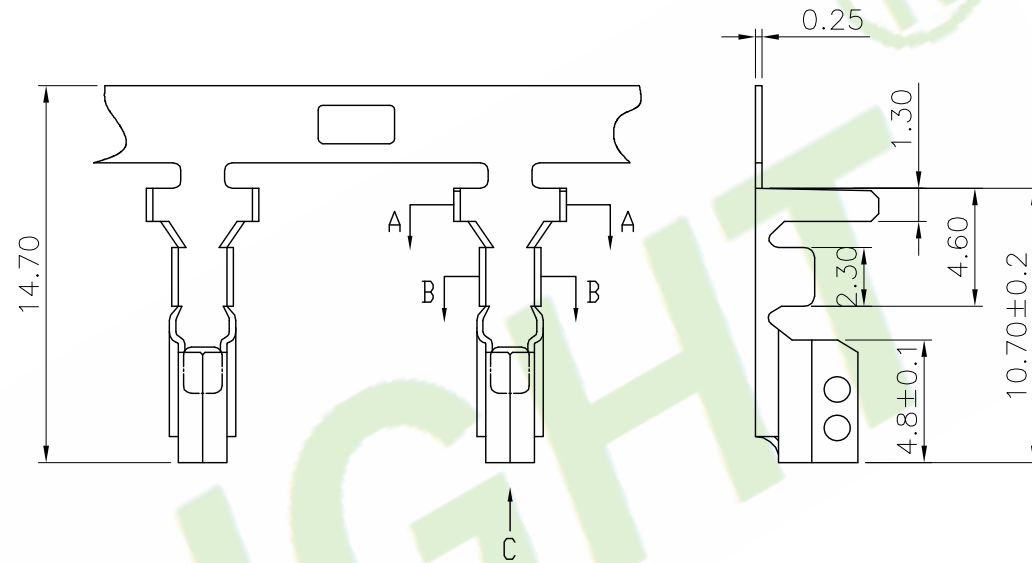

Ordering Information


H3969T-PQ

1 2 3


1: Series No.

2: T: Terminal


3: Q: Tin Plated

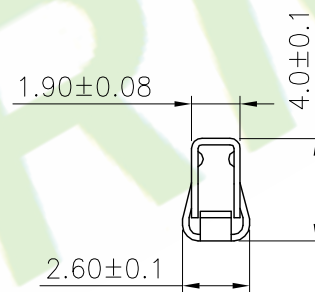

SEC C



SEC A-A



SEC B-B

5X				DR.BY.: Kenry	GENERAL TOLERANCE:		PART NO : H3969T-PQ		HJBRIGHT® 东莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED				
4X					LINEAR ANGLES		DWG. NO.:						
3X				CHKD.: Tony	x.: ±0.30 x': ±5.0°	TITLE : 3.96mm Pitch Terminal Connector		SHEET: 1/1					A4
2X	Update code option	Judyyan	20221230		x.x: ±0.20 x.x': ±3.0°								
1X	ORIGINAL	Kenry		APPD.:	x.xx: ±0.15 x.xx': ±2.0°	SCALE: 1:1							
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.10 x.xxx': ±1.0°	DATE: 24-Jun-2015		UNIT: mm	THIRD ANGLE PROJECTION				