

RoHS Compliant

Specifications:

Material And Finish:

Insulator:PBT UL94V-0

Plated:See Ordering Information

Rating:

Current Rating:10.0Amp(16AWG)

Voltage Rating:250V AC/DC



Operating Temperature Range:-40~+105°C

Electrical:

Contact resistance:10m Ohm Max

Insulator resistance:100M ohm min.

Withstanding Voltage:1000V AC/Minute

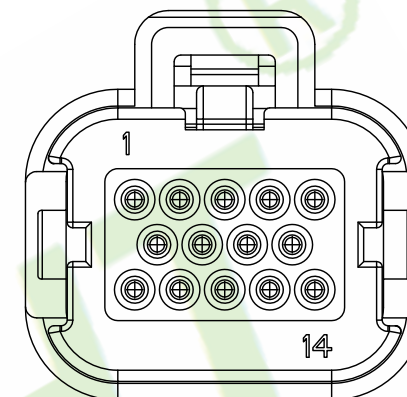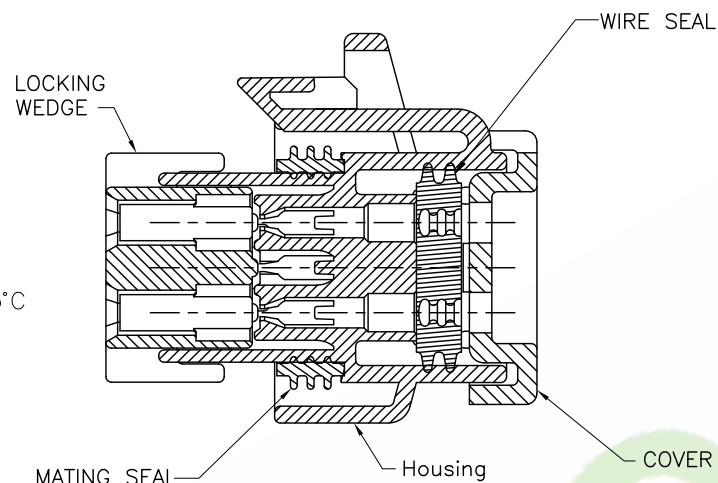

Ordering Information

H400005-14-XX-X

1 2 3 4

1:— Series No.


2:— No. of Positions

3:— See Table


4:— A:In bag

B:In Tube

C:In Tray

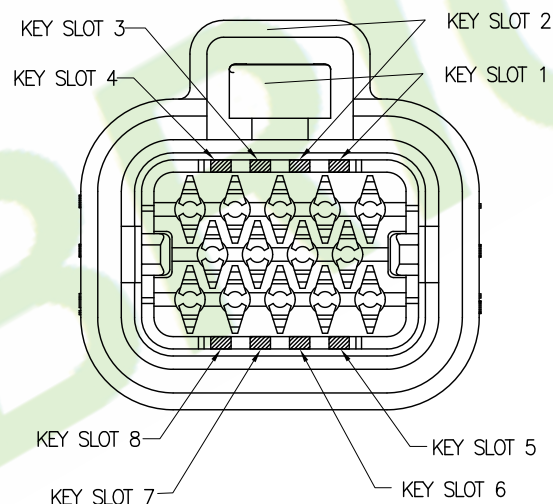

H400005-14-04-X	3 10 5
H400005-14-03-X	2 & 8
H400005-14-02-X	1 & 6
H400005-14-01-X	3 & 7
P/N	KEY SLOT

5X				DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : H400005-14-XX-X	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		SHEET: 1/1 SCALE: 1:1 UNIT: mm	 THIRD ANGLE PROJECTION	A4
4X				CHKD.: Tony	LINEAR	ANGLES	DWG. NO.:					
3X				APPD.: Billy	X.: ±0.35	X': ±5.0°	TITLE : 14 POS SEAL PLUG ASS					
2X	Update code option	DENG	20230413		X.X: ±0.25	X.X': ±3.0°	DATE: 20-Oct-2017					
1X	ORIGINAL	Samson			X.XX: ±0.15	X.XX': ±2.0°						
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XXX: ±0.15	X.XXX': ±1.0°						