

RoHS Compliant

Specifications:

Material And Finish:

Insulator:PBT UL94V-0 Color:Black

Plated:See Ordering Information

Rating:

Current Rating:5Amp(single pin)20AWG

Voltage Rating:50V AC/DC

Operating Temperature Range:-40°~+120°C

Electrical:

Contact resistance:10m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information

H40350-06P-XX-A

1 2 3 4

1: — Series No.

2: — No. of Positions



3: — 01:A Type

02:B Type




03:C Type

V3A:A Type Empty 3P


4: — A:In Bag

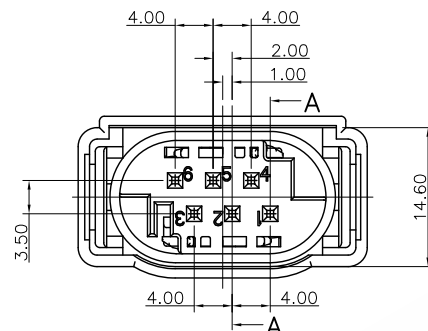

A-A

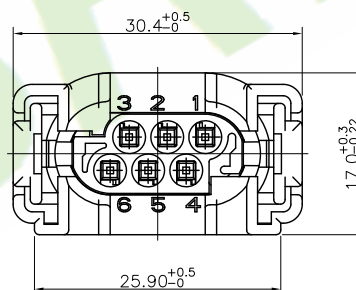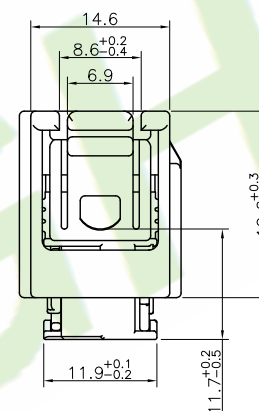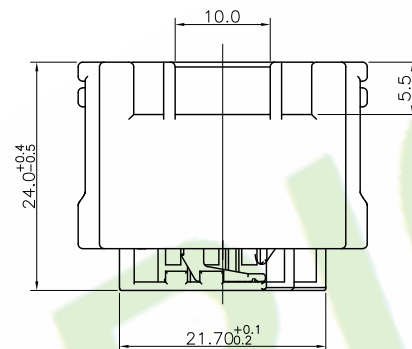


A Type




A Type V3A


Empty 3P: 2P,3P,6P



B Type



C Type




Pos.	Description	Color	Pos.
①	PBT socket housing	Grey	1PCS
②	Contact fuse MQV30	Green	2PCS
③	PBT seal	Natural	1PCS
④	Protective cap PBT	Black	1PCS

5X			
4X			
3X			
2X	Update Code options	Judyyan	20221125
1X	ORIGINAL	Mark	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.:	Mark
CHKD.:	Tony
APPD.:	Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ±0.40	X': ±5.0°
X.X: ±0.30	X.X': ±3.0°
X.XX: ±0.20	X.XX': ±2.0°
X.XXX: ±0.10	X.XXX': ±1.0°

PART NO : H40350-06P-XX-A
DWG. NO.:
TITLE : 4.0*3.5mm Pitch Housing MQS
DATE: 24-Sep-2021

HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
SHEET: 1/1	 THIRD ANGLE PROJECTION
SCALE: 1:1	
UNIT: mm	

A4