

Specifications:**Material And Finish:**

Insulator:PBT UL94V-0

Plated:See Ordering Information

Rating:

Current Rating:5.0Amp(20AWG)

Voltage Rating:50V AC/DC

Operating Temperature Range:-40°~+120°C

Electrical:

Contact resistance:10m Ohm Max

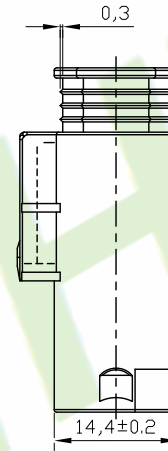

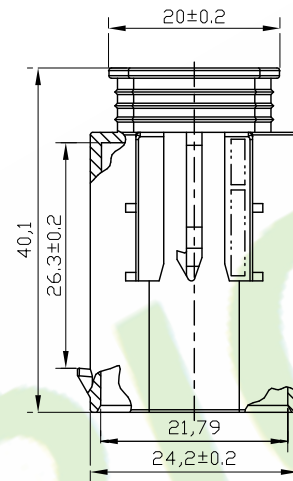



Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information**H40350-XXP-XXX**

1 2 3 4

- 1: — Series No.
 2: — No. of Positions
 3: — 01: A Type
 02: B Type
 4: — A:In Bag
 C:In Tray


**A Type****B Type**

5X			
4X			
3X			
2X	Update Code options	Judyyan	20221125
1X	ORIGINAL	Mark	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.:	Mark
CHKD.:	Tony
APPD.:	Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ±0.30	X': ±5.0°
X.X: ±0.20	X.X': ±3.0°
X.XX: ±0.15	X.XX': ±2.0°
X.XXX: ±0.10	X.XXX': ±1.0°

PART NO : H40350-XXP-XXX
DWG. NO.:
TITLE : 4.0mm Pitch Housing
DATE: 24-Sep-2021

HJBRIGHT® 東莞市華晶電子有限公司		
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
SHEET: 1/1		A4
SCALE: 1:1		
UNIT: mm		
THIRD ANGLE PROJECTION		