
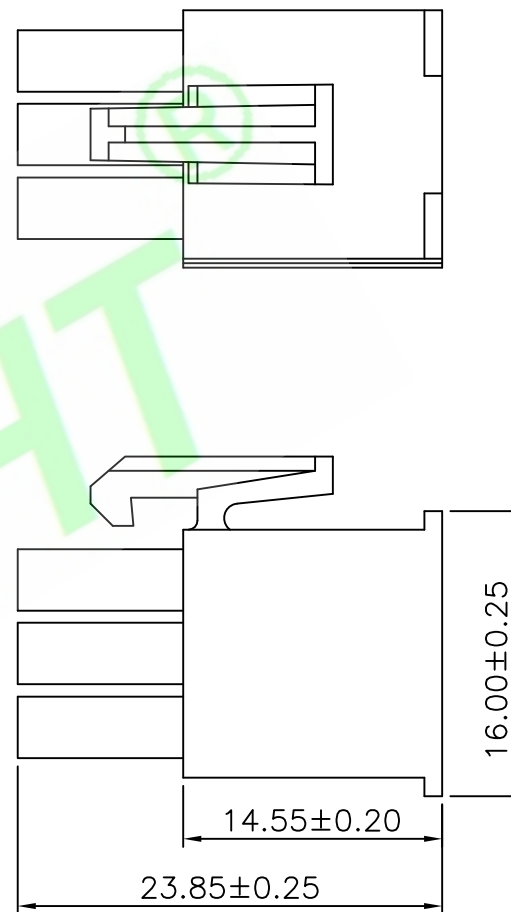


Operating Temperature Range: $-40^{\circ}\sim+105^{\circ}\text{C}$

1	2	3	4
---	---	---	---

- 1: — Series No.
2: — F:Female Housing
3: — No. of Positions
4: — W:White(UL94V-0)
N:Natural(UL94V-2)

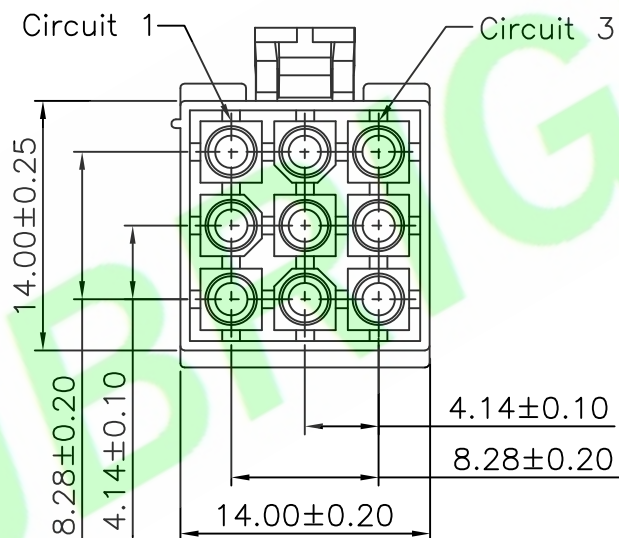

5X				DR.BY.: Bruce	GENERAL TOLERANCE:		PART NO : H4143F-09P-X		HJBRIGHT [®] 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED				
4X					LINEAR ANGLES								
3X				CHKD.: Tony	x.: ±0.30	x°: ±5.0°	4.14MM Female Housing		DWG. NO.:		 THIRD ANGLE PROJECTION	A4	
2X				x.x: ±0.25	x.x°: ±3.0°	TITLE :			SHEET: 1/1				
1X	ORIGINAL	Bruce		x.xx: ±0.15	x.xx°: ±2.0°				SCALE: 1:1				
REV.	DESCRIPTION	DR.BY	ECN. NO	APPD.: Billy	x.xxx: ±0.10	x.xxx°: ±1.0°	DATE: 20-May-2017		UNIT: mm				