

RoHS Compliant


Automobile
Product

Material:
Terminal:High Conductivity Copper Alloy
Wire Range:AWG#14~16
Insulation O.D.:2.78mm(Max)

Ordering Information
H4200TF-GS-XX

1 2 3 4

- 1: — Series No.
2: — TF:Female Terminal
3: — S:Matte Tin Plated
Q: Tin Plated
4: — 01:14AWG
02:16AWG

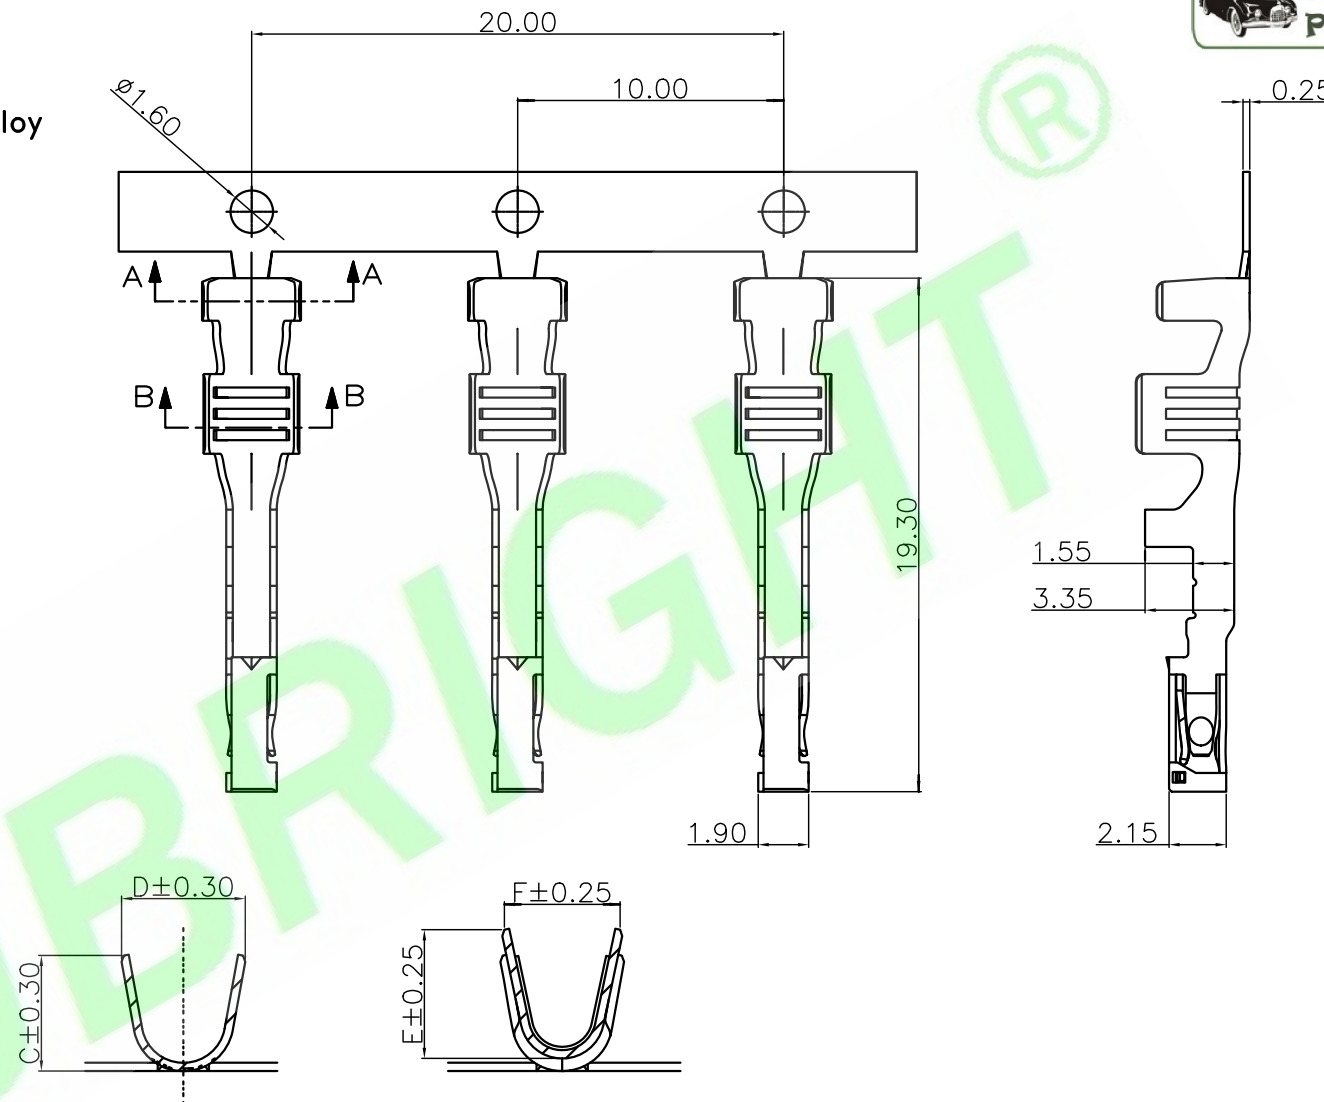

SECTION A-A
SCALE 8:1

SECTION B-B
SCALE 8:1

Type	WIRERANGE	INS.RANGE	C	D	E	F
01	AWG#14	2.78mm Max	3.47	3.72	3.87	3.48
02	AWG#16	2.42mm Max	3.02	3.00	3.32	3.00

DR.BY.: Zolin	GENERAL TOLERANCE:		PART NO : H4200TF-GS-XX	
	LINEAR	ANGLES	DWG. NO.:	
CHKD.: Tony	X.: ±0.25	X':	TITLE :	
	X.X: ±0.15	X.X':	4.2mm Pitch Female Terminal	
APPD.: Billy	X.XX: ±0.05	X.XX':	DATE: 12-Jan-2025	

HJBRIGHT 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4

1X	ORIGINAL	Zolin	
REV	DESCRIPTION	DR.BY	ECN. NO