

RoHS Compliant

Specifications:

Material And Finish:



Insulator:Nylon66 UL94V-0 Color:Natural
Plated:See Ordering Information

Rating:

Current Rating:13Amp Max(16AWG Per Pin)
Voltage Rating:600V AC/DC
Operating Temperature Range:-40°~+105°C

Electrical:


Contact resistance:10m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:1500V AC/Minute

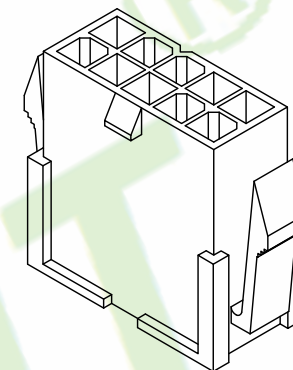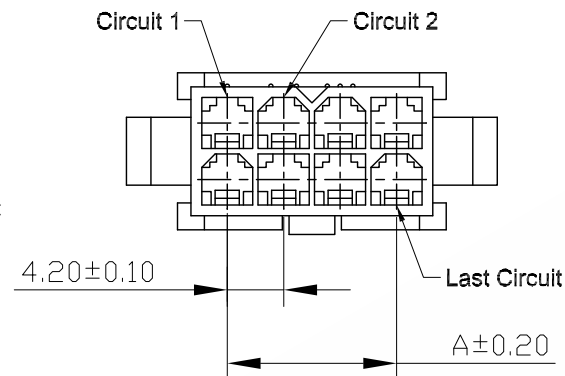

Ordering Information

H42012-XXP-02-A
1 2 3

1:—Series No.
2:—No. of Positions
3:—A:InBag

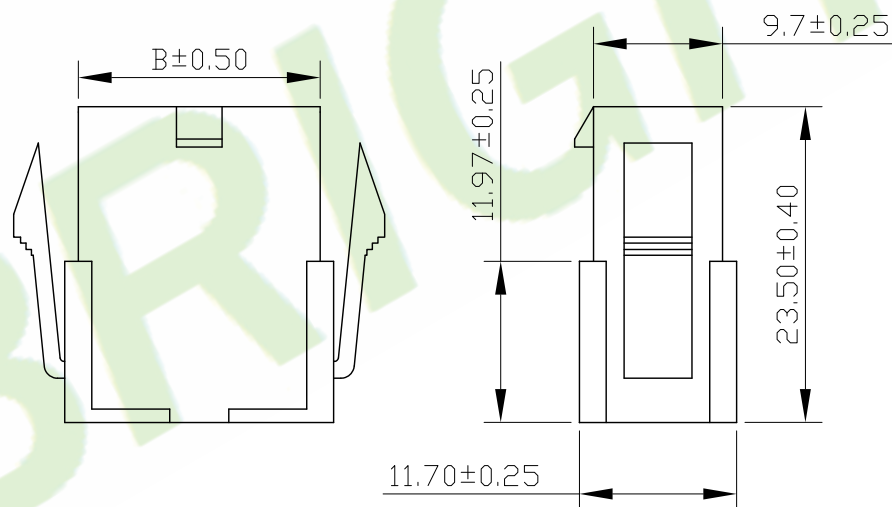

Circuits	Dimensions(mm)	
	A	B
2x1P	---	5.40
2x2P	4.20	9.60
2x3P	8.40	13.80
2x4P	12.60	18.00
2x5P	16.80	22.20
2x6P	21.00	26.40
2x7P	25.20	30.60
2x8P	29.40	34.80
2x9P	33.60	39.00
2x10P	37.80	43.20
2x11P	42.00	47.40
2x12P	46.20	51.60

5X				DR.BY.: Bruce	GENERAL TOLERANCE:		PART NO : H42012-XXP-02-A	HJBRIGHT® 东莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
4X					LINEAR	ANGLES	DWG. NO.:		
3X				CHKD.: Tony	X.:	X': ±	TITLE :	SHEET: 1/1 SCALE: 1:1 UNIT: mm	
2X		Deng	20230701	APPD.: Billy	X.X: ±0.25	X.X': ±6°	4.2mm Housing connector		
1X	ORIGINAL	Bruce			X.XX: ±15	X.XX': ±3°	DATE: 12-Jan-2014	 THIRD ANGLE PROJECTION	
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XXX: ±0.08	X.XXX': ±2°			

A4