


Specifications:
Material And Finish:
Insulator:Nylon 66 Color:Natural

Rating:
Current Rating:9.0 Amp
Voltage Rating:600V AC/DC
Operating Temperature Range:−25°~+85°C

Electrical:
Contact resistance:20m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:1500V AC/Minute
UL:E357750

Ordering Information
H4201M-XXP-01-XXA
1 2 3 4 5 6

- 1:— Series No.
2:— M:Male Housing
3:— No. of Positions
4:— A:PA66 UL94V-0
B:PA66 UL94V-2
5:— B:Black
N:Natural
6:— A:In Type

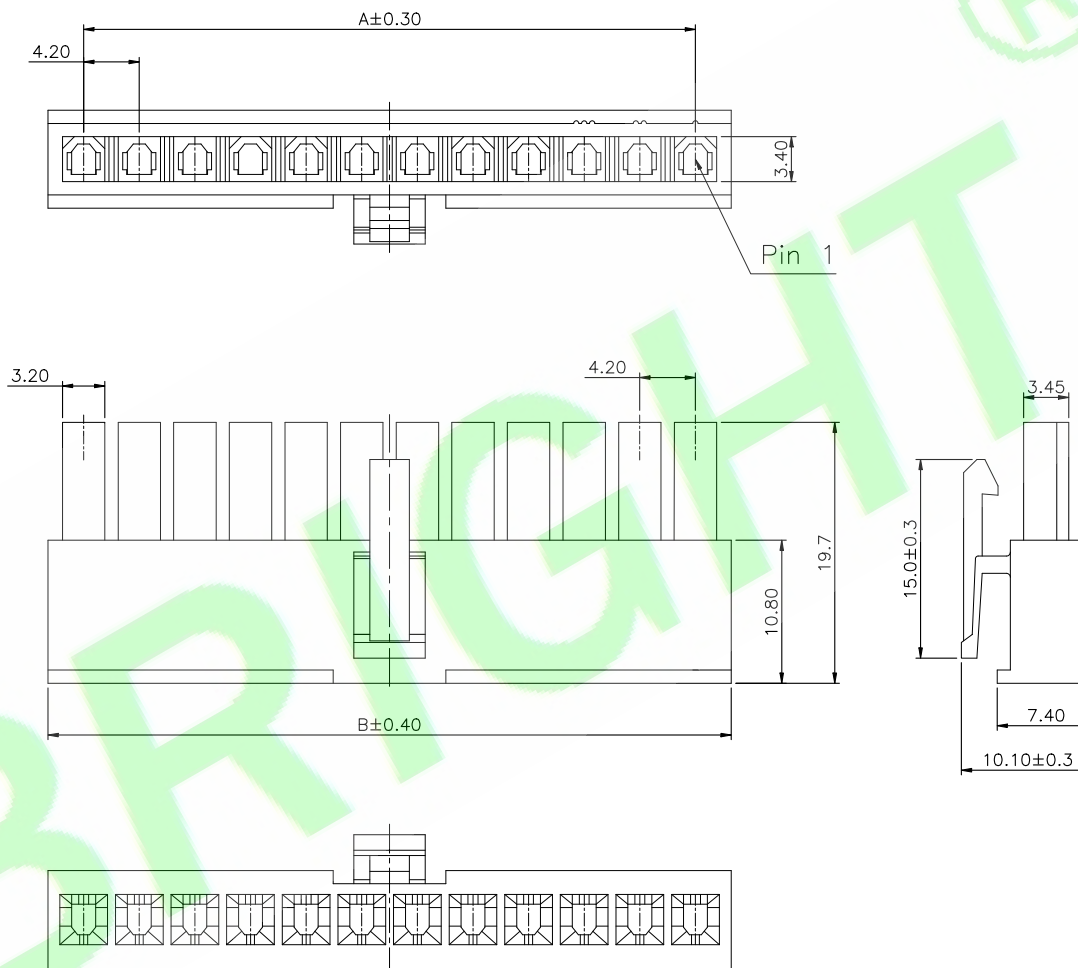

No.	Dimensions	
	A	B
02	4.20	9.60
03	8.40	13.80
04	12.60	18.00
05	16.80	22.20
06	21.00	26.40
07	25.20	30.60
08	29.40	34.80
09	33.60	39.00
10	37.80	43.20
11	42.00	47.40
12	46.20	51.60

DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : H4201M-XXP-01-XXA
	LINEAR	ANGLES	
CHKD.: Tony	X.: ±0.40	X': ±5.0°	DWG. NO.:
	X.X: ±0.30	X.X': ±3.0°	
APPD.: Billy	X.XX: ±0.20	X.XX': ±2.0°	TITLE : 4.2mm Pitch Housing
	X.XXX: ±0.10	X.XXX': ±1.0°	
DATE: 30-Apr-2024			

HJBRIGHT 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/2

SCALE: 1:1

UNIT: mm




THIRD ANGLE PROJECTION


A4

1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO.


02P




08P

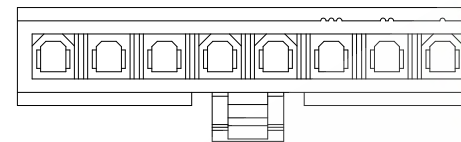


03P




09P

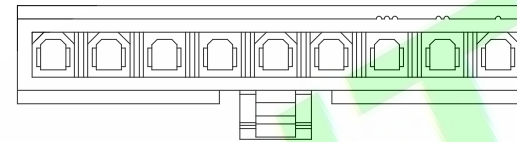


04P




10P

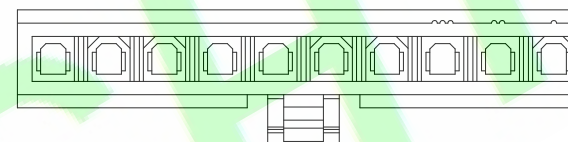


05P




11P

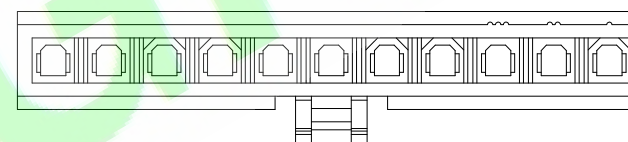


06P

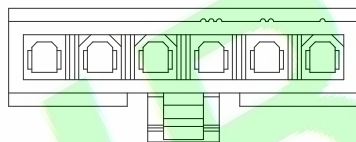

12P

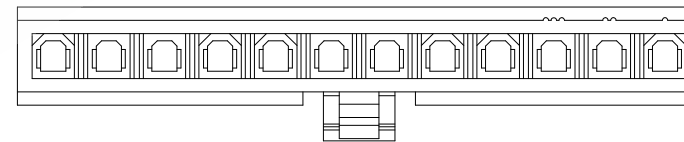

07P

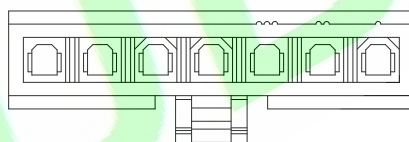

1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : H4201M-XXP-01-XXA
	LINEAR	ANGLES	
CHKD.: Tony	X.: ± 0.40	X': $\pm 5.0^\circ$	DWG. NO.:
	X.X: ± 0.30	X.X': $\pm 3.0^\circ$	
APPD.: Billy	X.XX: ± 0.20	X.XX': $\pm 2.0^\circ$	TITLE : 4.2mm Pitch Housing
	X.XXX: ± 0.10	X.XXX': $\pm 1.0^\circ$	
			DATE: 30-Apr-2024

HJBRIGHT[®] 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 2/2

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4