

Specifications:

Material And Finish:

Insulator:PBT+10GF UL94V-0

Color:Black

Rating:

Current Rating:7.5 Amp(Power)

Operating Temperature Range:-40°~+120°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:50M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information

H4203M-04P-01-BA

1 2 3 4 5






1: — Series No.

2: — M:Male Housing



3: — No. of Positions

4: — B:Black

5: — A:In Bag

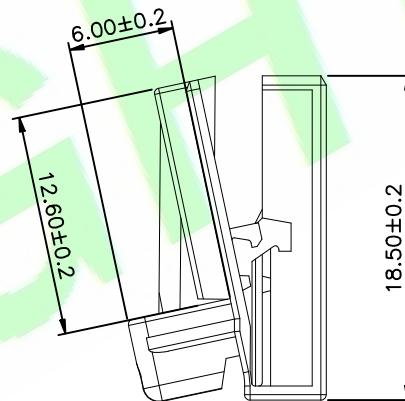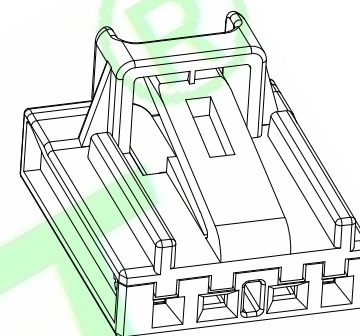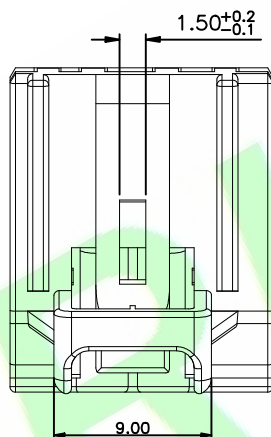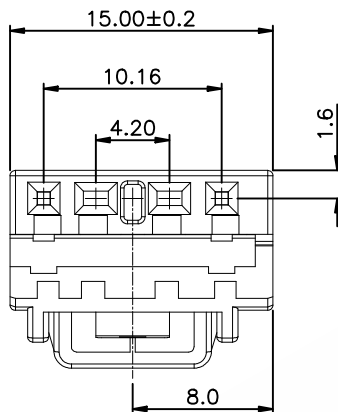

Locked Position




5X			
4X			
3X			
2X			
1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Judyyan
CHKD.: Aren
APPD.: Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ±0.40	X': ±5.0°
X.X: ±0.30	X.X': ±3.0°
X.XX: ±0.20	X.XX': ±2.0°
X.XXX: ±0.10	X.XXX': ±1.0°

PART NO : H4203M-04P-01-BA
DWG. NO.:
TITLE : 4.2*10.16mm Pitch Housing 4P MQS
DATE: 19-Dec-2022

HJBRIGHT® 東莞市華晶電子有限公司	
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
SHEET: 1/1	 THIRD ANGLE PROJECTION
SCALE: 1:1	
UNIT: mm	
A4	