

Specifications:

Material And Finish:

Insulator:PA66 UL94V-0 ,Color:Grey

Rating:

Current Rating:13.0 Amp (14AWG)

Voltage Rating:250V AC/DC

Operating Temperature Range:-55°~+125°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:2000V AC/Minute

Waterproofing grade:IP68,IP6K9K

Ordering Information

H445001F-12P-01-AA

1 2 3 4

1: — Series No.





2: — F:Female

3: — No. of Positions

3: — Key and colour option

01:A Type Gray

4: — A:In Bag

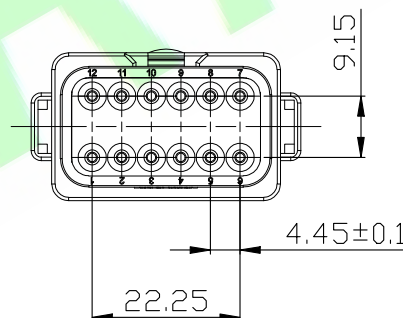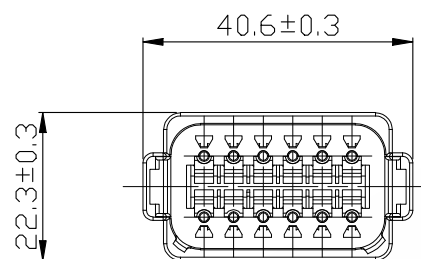

DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : H445001F-12P-XX-AA
	LINEAR	ANGLES	
CHKD.: Tony	X.: ±0.30	X.X: ±3.0°	DWG. NO.: TITLE : 9.12*4.45 Pitch Waterproof WTW Connector Female
	X.XX: ±0.20	X.XX: ±2.0°	
APPD.: Billy	X.XXX: ±0.10	X.XXX: ±1.0°	DATE: 7-Sep-2023

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4

1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO.