

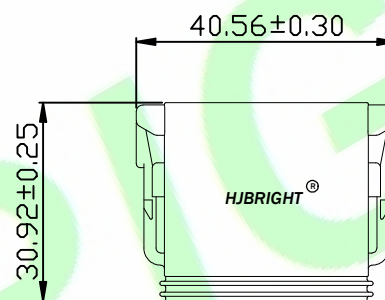



Specifications:
Material And Finish:
Insulator:PA66 UL94V-0


Rating:
Current Rating:14.0 Amp
Voltage Rating:250V AC/DC
Operating Temperature Range:-40°~+105°C

Electrical:
Contact resistance:20m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:1000V AC/Minute

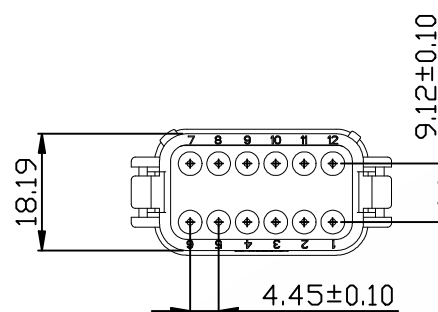


Ordering Information
H445001M-12P-XX-A
1 2 3 4 5

- 1: — Series No.
2: — M:Male
3: — No. of Positions
4: — key and colour option;
01:A Type Gray
02:B Type Green
5: — A:In Bag



01 A Type Gray



02 B Type Green

5X				DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : H445001M-12P-XX-A	HJBRIGHT® 东莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
4X					LINEAR	ANGLES	DWG. NO.:				
3X				CHKD.: Tony	x.: ±0.30	x.: ±5.0°	TITLE : 9.12*4.45 Pitch Waterproof WTW Connector Male	SHEET: 1/1		A4	
2X	增加绿色防呆规格, 更新料号	Judyyan	20231207		x.x: ±0.20	x.x: ±3.0°		SCALE: 1:1			
1X	ORIGINAL	Judyyan		APPD.: Billy	x.xx: ±0.10	x.xx: ±2.0°		UNIT: mm			THIRD ANGLE PROJECTION
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.10	x.xxx: ±1.0°	DATE: 14-Jun-2021				