

Specifications:

Material And Finish:

Contact: Copper alloy

Rating:

Current Rating: 14.0Amp (14AWG)

Voltage Rating: 250V AC/DC

Operating Temperature Range: $-40^{\circ}\sim+105^{\circ}\text{C}$

Electrical:

Contact resistance: 20m Ohm Max

Wire Gauge: #14~20AWG

Ordering Information


H445001TM-PQ


1 2 3

1: Series No.

2: TM: Male Terminal

3: Q: Tin Plated

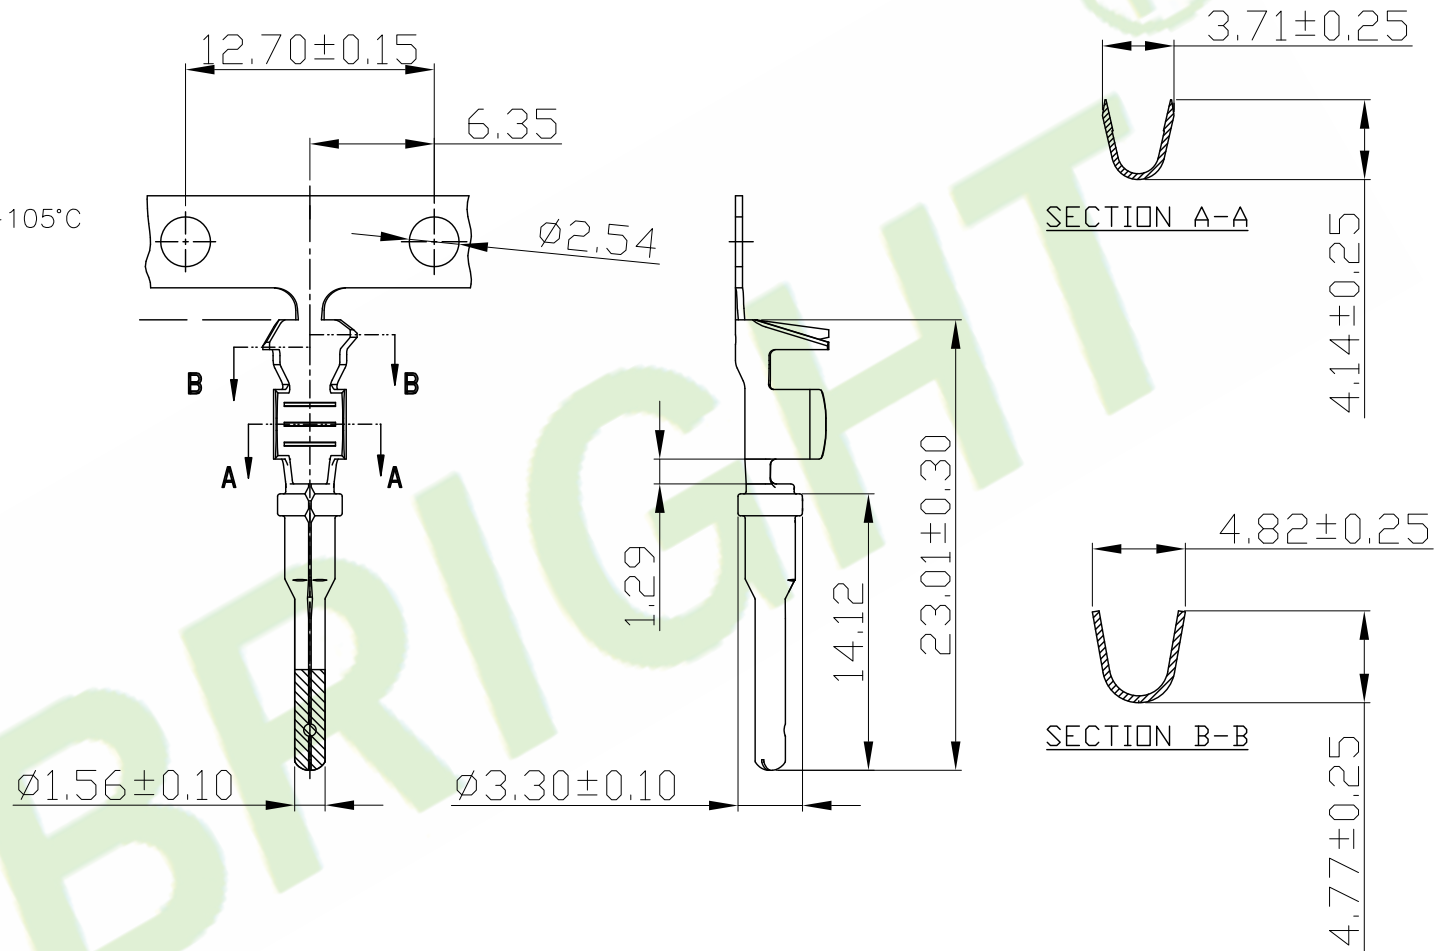

5X				DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : H445001TM-PQ		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X						LINEAR	ANGLES				
3X				CHKD.: Aren	x.: ±5.0°	x': ±5.0°	DWG. NO.:		SHEET: 1/1		A4
2X					x.x: ±0.30	x.x': ±3.0°	TITLE :				
1X	ORIGINAL	Judyyan		APPD.: Billy	x.xx: ±0.20	x.xx': ±2.0°	9.12*4.45 Pitch Waterproof WTW Male Terminal		UNIT: mm		
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.10	x.xxx': ±1.0°	DATE: 14-Jun-2021		THIRD ANGLE PROJECTION		