

Specifications:

Material And Finish:

Insulator:PBT UL94V-0

TPA:PBT Color:Orange



Rating:

Operating Temperature Range:-40°~+100°C


Electrical:

Insulator resistance:100M ohm min.

Withstanding Voltage:1000V DC/Minute



(1/1)



Ordering Information

H50002M-12P-XX-A

1 2 3 4 5

1: — Series No.

2: — M:Male Housing


3: — No. of Positions

4: — 01:A Type Grey

02:B Type Green

03:C Type Blue




5: — A:In Bag

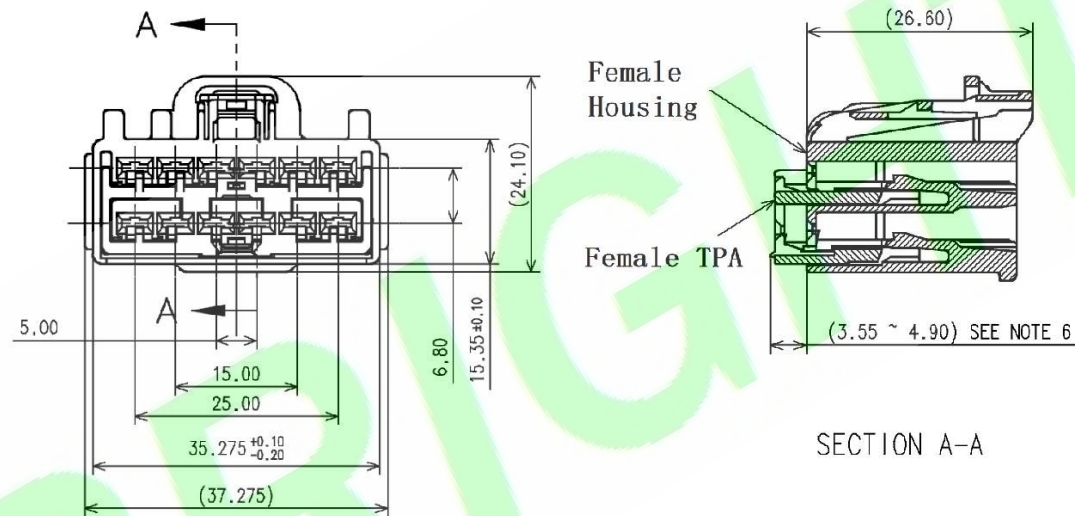

A Type Grey

B Type Green

C Type Blue



DR.BY.:

Samson

CHKD.:

Tony

APPD.:

Billy

GENERAL TOLERANCE:

LINEAR

ANGLES

X.: ±0.40

X': REF±6°

X.X: ±0.35

X.X': ±3.0°

X.XX: ±0.25

X.XX': ±2.0°

X.XXX: ±0.15

X.XXX': ±2.0°

PART NO : H50002M-12P-XX-A

DWG. NO.:

TITLE :

Pitch 5.0mm Double Row Connector Housing

DATE: 27-Aug-2023

HJBRIGHT®


東莞市華晶電子有限公司

BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4

1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO.