

Specifications:**Material And Finish:**

Insulator:PBT,UL94V-0

Rating:

Current Rating:7 Amp(18AWG)

Voltage Rating:300V AC/DC

Operating Temperature Range:-40°C~+105°C

Electrical:

Contact resistance:10m Ohm Max

Insulator resistance:1000M Ohm min.

Withstanding Voltage:1500V AC/Minute

Ordering Information**H5004-XXP-01-XA**

1 2 3 4

1: — Series No.




2: — No. of Positions

3: — R: RED


B: BLUE

N: NATURAL

4: — A: In Bag

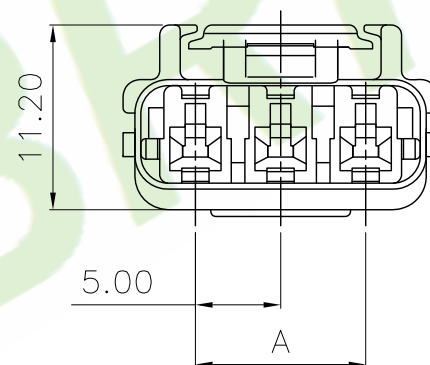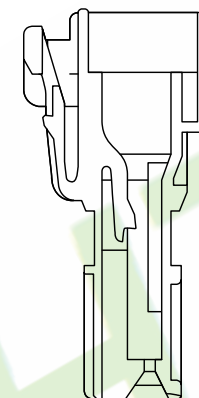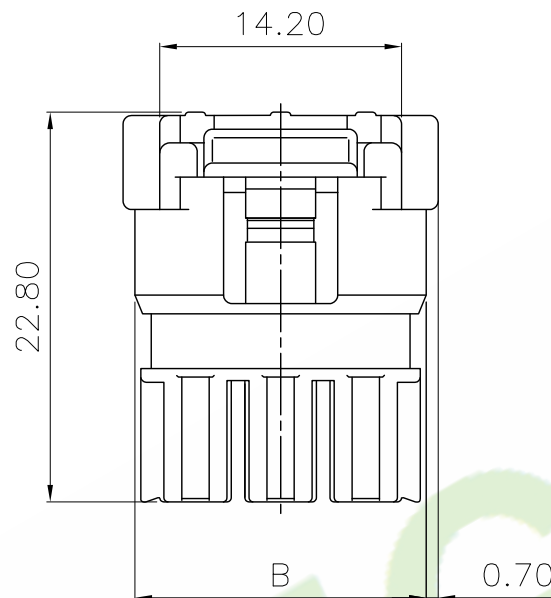

No.	Dimension mm	
	A	B
2	—	12.1
3	10.0	17.1

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : H5004-XXP-01-XA	HJBRIGHT® 东莞市華晶电子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		SHEET: 1/1		A4
4X				Judyyan	LINEAR	ANGLES	DWG. NO.:					
3X				CHKD.:	X.:	X': ±5.0°	TITLE :	5.0mm Pitch Housing		SCALE: 1:1	THIRD ANGLE PROJECTION	
2X				Aren	X.X: ±0.40	X.X': ±3.0°				UNIT: mm		
1X	ORIGINAL	Judyyan		APPD.:	X.XX: ±0.25	X.XX': ±2.0°	DATE: 11-Jul-2021					
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	X.XXX: ±0.15	X.XXX': ±1.0°						