

Specifications:**Material And Finish:**

Terminal: Copper alloy

Rating:

Current Rating: 7 Amp

Voltage Rating: 300V AC/DC

Operating Temperature Range: -25°C ~ +85°C

Electrical:

Contact resistance: 20m Ohm Max

Insulator resistance: 1000M Ohm min.

Withstanding Voltage: 1500V AC/Minute

Wire Rang: AWG#22 to #18

Ordering Information**H5004TF-PQ**


1 23 4


1: — Series No.

2: — T: Terminal

3: — F: Female

4: — Q: Tin Plated

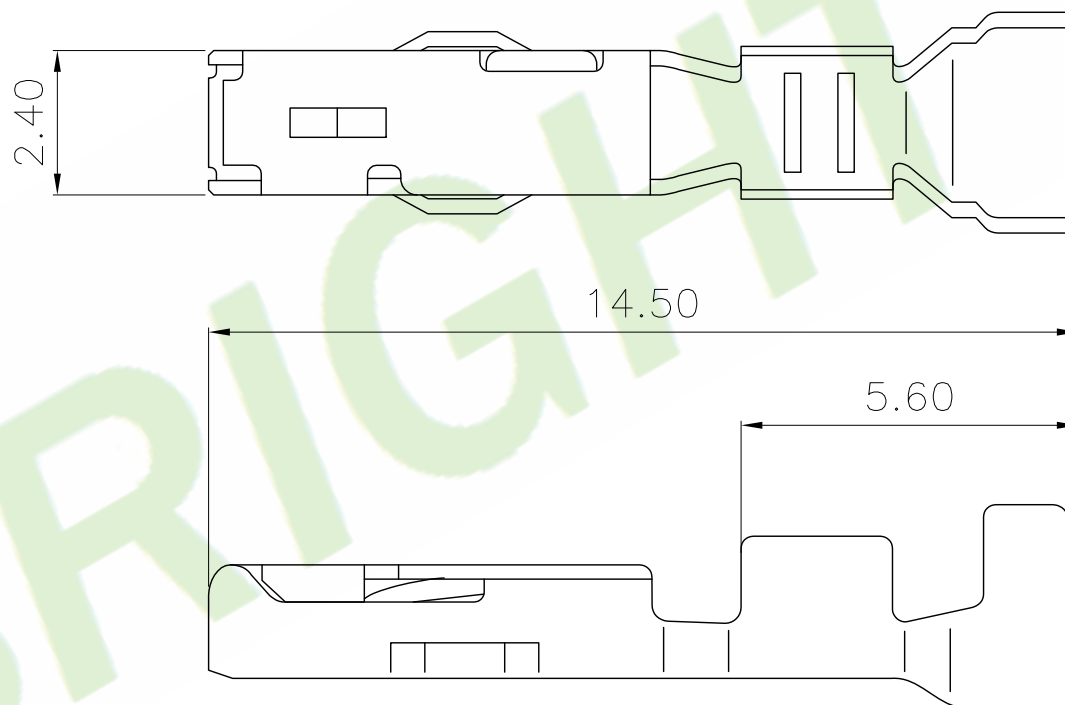

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : H5004TF-PQ		HJ BRIGHT® 东莞市華晶电子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			 THIRD ANGLE PROJECTION	A4
4X				Judyyan	LINEAR	ANGLES	DWG. NO.:						
3X				CHKD.:	X.:	X': ±5.0°	TITLE : 5.0mm Pitch Terminal		SHEET: 1/1				
2X				Aren	X.X: ±0.40	X.X': ±3.0°			SCALE: 1:1				
1X	ORIGINAL	Judyyan		APPD.:	X.XX: ±0.25	X.XX': ±2.0°	DATE: 11-Jul-2021		UNIT: mm				
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	X.XXX: ±0.15	X.XXX': ±1.0°							